

DRAFT

Text to Accompany

Hazard Map of Potential Rapidly Moving Landslides in Western Oregon

GIS Layer for Local Governments
in Implementation of Senate Bill 12 (1999)

by

R. Jon Hofmeister

Oregon Department of Geology and Mineral Industries

Daniel J. Miller

Earth Systems Institute

Keith A. Mills and Jason C. Hinkle

Oregon Department of Forestry

Ann E. Beier

Oregon Department of Land Conservation and Development



Oregon Department of Geology
and
Mineral Industries

Interpretive Map Series IMS-22

2002

Published in conformance with ORS 516.030

Cover photos

The pictures show an example of a landslide occurrence and the damage it caused: the Royse residence destroyed in February 1996 by a slide in the Dodson/Warrendale area of the Columbia River Gorge.

Photos courtesy of Kenneth Cruikshank, Portland State University (left), and Dave Wieprecht, U.S. Geological Survey (right).

NOTE

The map of this publication depicts landslide hazard zones on the basis of limited data, as described in the text. It **cannot serve as a substitute for site-specific investigations by qualified practitioners**. At any point, site-specific data may give results that differ from those shown on the map.

The Oregon Department of Geology and Mineral Industries is publishing this study because the information furthers the mission of the Department. To facilitate timely distribution, IMS-22 has not been edited to our usual standards.

For copies of this publication or other information about Oregon's geology, contact

Nature of the Northwest Information Center
800 NE Oregon Street #5
Portland, Oregon 97232
(503) 872-2750
<http://www.naturenw.org>

TABLE OF CONTENTS

Summary	1
Introduction	2
Rapidly Moving Landslides	4
Characteristics of Debris Flows	7
Trigger Mechanisms	7
Severe Rain Storms	8
Human Actions	10
Debris Flow Initiation	11
Transport	12
Deposition	13
Hazard Mapping Overview	16
Initial GIS Modeling	16
Targeted Field Investigations	16
Improved GIS Modeling	17
Qualitative and Quantitative Testing	19
Additional Field Checks	20
Final Selection of Parameters and Map Generation	21
Map Results and Discussion	23
Areas Affected	23
Quantification of Hazard Designations	24
Limitations	27
Risk Management Strategies	28
Planning, Policy, and Education Efforts	29
Information Dissemination/Increasing Awareness	29
Public Policy Programs	29
Debris Flow Warning Systems	29
Traffic Alerts and Temporary Closures	30
Engineered Mitigation	30
Source Area Stabilization	31
Remedial Measures in the Transport Zone	31
Protection Efforts in the Deposition Zone	31
Map Updates and Future Work	36
Acknowledgments	37
References Cited	38
Appendix A: Glossary of Terms	43
Appendix B: Input Parameters for the GIS Modeling	45
Appendix C: List of Draft Map Reviewers	49

Figures

1. Royse residence in the Dodson/Warrendale area	3
2. Residences in the Scottsburg area	3
3. Landslide types	5
4. Rockslide that occurred along the Wilson River Highway (Hwy 6) in 1991	6
5. Diagram of a debris flow showing zones of initiation, transport, and deposition	7
6. Photo of a debris flow showing zones of initiation, transport, and deposition	7
7. Small initiating landslide.....	8
8. Scoured transport zone	8
9. Tangled debris flow deposit	8
10. Schematic of a slope, showing driving and resisting elements	9
11. Distribution of the landslides triggered by the storms of 1996/97	9
12. Map of estimated 24-hour rainfall intensity-duration thresholds	10
13. Schematic of divergent, straight, and convergent topography.....	11
14. Fine grained fan deposit in the Dodson/Warrendale area	14
15. Unchannelized debris flow deposit	15
16. Schematic of transition from debris flow to hyperconcentrated flow to flooding	15
17. Schematic of the iterative process used to develop the map	16
18. Geomorphic features that can aid in the identification of historic debris flows	17
19. Map showing areas where field investigations were performed.....	18
20. Percentage of landslides identified by various slope threshold selections	20
21. Generalized geographic separation used for selecting hazard cutoff values.....	21
22. Output examples for Salem and Dodson/Warrendale area	24
23. Typical highest-hazard home locations	25
24. Example of gradation in a mapped hazard	25
25. The 19 western Oregon counties covered by the Further Review Area map	26
26. Coalescing debris flow sources in Nagasaki, Japan.....	26
27. Examples of monitoring devices for debris flow warnings	30
28. Debris fences installed below potential debris flow initiation sites	31
29. Steel-lattice dam constructed in Kirchbachgraben, Austria	32
30. Ground sills constructed in Nagano, Japan.....	32
31. Clear-span bridge constructed in Canton of Bern, Switzerland.....	33
32. Steel-cell barrage structure constructed on the Issyk River, Kazakhstan	33
33. Check dam in Hyogo, Japan before and after a debris flow.....	34
34. Protection wall constructed on the Bolshaya Almatinka River, Kazakhstan	35
35. Schematic of an A-shaped deflection wall serving to deflect debris.....	35

Tables

1. Parameters used for defining deposition hazard zones	21
2. Further Review Area breakdown by ownership in Josephine County	23
3. Summary of predicted capture rates for the Further Review Area zones	25

Hazard Map of Potential Rapidly Moving Landslides in Western Oregon

GIS Layer for Local Governments
in Implementation of Senate Bill 12 (1999)

by

R. Jon Hofmeister, Oregon Department of Geology and Mineral Industries;
Daniel J. Miller, Earth Systems Institute;
Keith A. Mills and Jason C. Hinkle, Oregon Department of Forestry; and
Ann E. Beier, Oregon Department of Land Conservation and Development

SUMMARY

Landslides are a serious geologic hazard, threatening public safety, natural resources, and infrastructure, and costing millions of dollars for repairs each year in Oregon. This map of areas where rapidly moving landslides pose hazards in western Oregon is part of the State's attempt to protect lives and property.

In 1999, the Oregon State Legislature enacted Senate Bill 12, which established Oregon's current policy for addressing rapidly moving landslide hazards. In response to SB 12, this map delineates Further Review Areas to be administered by local governments. Further Review Areas are high-hazard zones for debris flows; property in these areas should be evaluated at a site-specific scale. The map is digital and was produced with data at a scale of 1:24,000 (1 in. = 2,000 ft). Therefore, the information it provides is appropriate only at that scale or a smaller scale (e.g., 1:48,000) and cannot show greater detail if viewed at any larger scale (e.g., 1:12,000).

Creation of the map involved the use of Geographic Information System (GIS) modeling, checking and calibrating with limited field evaluations, and comparing with historic landslide inventories. The Oregon Department of Geology and Mineral Industries worked with the Oregon Department of Forestry, the Oregon Department of Land Conservation and Development, Earth Systems Institute, and a number of landslide researchers to compile data and create the map.

The extent and severity of hazard posed by rapidly moving landslides varies considerably across western Oregon. In general, the most hazardous areas are mountainous terrains – which are usually sparsely populated – especially drainage channels and depositional fans easily associated with debris flows.

Where Further Review Areas intersect with human development, use of the map can help to assess the risk and prioritize risk-reduction activities. Various options are available to reduce the risk of landslide losses. Risk-reduction activities can include engineering solutions, public education, warning systems, temporary road closures and evacuation, land use regulation, and many other options. Although this project addresses a range of rapidly moving landslides, this map is not a compilation of all possible landslide hazards.

INTRODUCTION

Landslides are a common occurrence in Oregon. Landslide impacts, such as those shown in Figures 1 and 2, can be devastating to individuals, businesses, and communities, and millions of dollars are spent annually on repairing landslides in Oregon (Wang and others, in preparation).

Although landslides occur virtually every year in Oregon, general awareness and recognition of landslide hazards remain relatively low. The ephemeral nature of landslides, the location of many events in relatively undeveloped areas, and the fact that landslide damages are often quickly repaired contribute to the low awareness. In addition, programmatic recordkeeping of landslide locations is rare, which limits transfers of information generation-to-generation and between technical specialists and the general public.

In an attempt to address particularly dangerous landslide hazards more systematically, the Oregon legislature adopted Senate Bill 12¹ (SB 12) in 1999. SB 12 established Oregon's current state-level policy specifically addressing "rapidly moving landslides" (those that a person cannot reasonably outrun). The bill also defined required uses of a "Further Review Area" map by local governments and outlined specific state and local actions to address landslide hazards.

The overarching goal of SB 12 is to save lives and reduce future landslide losses. An important step towards achieving this goal is to systematically characterize the geographic extent and location of the hazards. Spatial identification of hazard and risk allows for more informed policies and implementation of strategies to effectively reduce risk.

This report describes the development of a

regional hazard map that provides a consistent, first-approximation description of terrain susceptible to rapidly moving landslides. The digital hazard map constitutes the Further Review Area map described in SB 12 and is released as a GIS layer that allows for comparisons with other relevant data. Although the primary users of the map will be local government planners, the map should also serve as a valuable tool for others. For example, transportation officials, foresters, emergency managers, ecologists, public policy makers, and property owners can benefit from a consistent and comprehensive means for identifying hazard zones in which rapidly moving landslides might occur.

The report provides information and background to support the application of the map, including sections on the following topics:

- Characteristics of the types of landslides addressed by the SB 12 hazard map;
- Methods used to develop the map;
- Important limitations and appropriate uses of the map;
- General strategies for mitigating rapidly-moving landslide hazards; and
- Potential areas for refinement of the map and assessment of other landslide hazards.

The report is not intended to be comprehensive but is meant rather to provide an introduction and overview. The authors have attempted to avoid the use of technical terminology where possible and have included a short glossary of terms (Appendix A). Relevant literature citations throughout the text refer to the list of "References Cited" at the end of the report and provide additional information for interested readers.

¹ Senate Bill 12 is codified as ORS 195.250-195.275, ORS 527.630-527.710 and is available on the web at <http://www.leg.state.or.us/99reg/measures/sb0001.dir/sb0012.d.html>. Amendments to the bill may be proposed and specifics may change.



Figure 1. Royse residence in the Dodson/Warrendale area, Columbia River Gorge, buried by landslide in February 1996.

Photo courtesy of Kenneth Cruikshank, Portland State University.



Figure 2. Residences in the Scottsburg area, Douglas County, hit by landslides in November 1996.

Photos courtesy of John Seward, Oregon Department of Forestry.



RAPIDLY MOVING LANDSLIDES

This study focuses on identifying areas subject to rapidly moving landslide hazards. Rapidly moving landslides were singled out in SB 12 primarily because they are the greatest landslide threat to human life and have the potential to cause sudden, catastrophic damage. The bill states that “rapidly moving landslides present the greatest risk to human life, and persons living in, or traveling through, areas prone to rapidly moving landslides are at increased risk of serious bodily injury or death” (Section 3.2). Mitigation alternatives for these types of landslides are limited, particularly after a structure is sited within a high-hazard zone.

In Oregon, a very common and particularly dangerous type of rapidly moving landslide is the debris flow (commonly referred to as a mudslide). While other types of rapidly moving landslides can also pose serious social and economic hazards, debris flows are the primary focus of SB 12. A major reason for this focus is the fact that the source of debris flows is often far away from their downslope impact areas (in some cases, miles). Seemingly insignificant landslides of 10 cubic yards (about the size of a dump-truck load of material) or less can increase in volume by 10 times or more if conditions are conducive to debris flow formation (Robison and others, 1999; Benda and others, 2000). As these masses move downslope, they can gain significant momentum and wreak havoc on objects in the way, plowing down trees, picking up boulders, and smashing anything else that happens to be in the path. Large debris flows can travel at velocities exceeding 50 mph and are easily capable of flattening homes, crush-

ing cars, and taking the lives of people in the path.

Although debris flows are the current focus, it is important to note that there are many different types of landslides, both slow- and fast-moving. Figure 3 shows a common classification scheme for landslides. All of these landslide types occur in Oregon and can be significant in local areas. Both large earthflows and comparatively small slope failures have caused extensive damage to structures in Oregon and continue to be persistent problems in many areas (Beaulieu and Olmstead, 1999). Rockfalls and rockslides are also common rapidly moving landslides and are particularly dangerous along Oregon highways (Pierson and Van Vickle, 1993).

In addition to debris flows, a few of the other types of fast-moving landslides are implicitly included in the SB 12 Further Review Area map. For example, many dangerous rockfall and rockslide areas are identified on the map. Figure 4 is a photograph of a major rockslide area along Oregon Highway 6 that is highlighted as a hazard on the Further Review Area map.

It is important to note, however, that substantial landslide hazard areas, including those associated with large earthflows in moderately to gently sloping terrain, small slumps, local rockfalls, and large volcanic debris flows (lahars), are neither explicitly nor implicitly addressed in this map product. This is not to diminish the importance of these significant hazards; however, they require different types of hazard analyses and warrant further evaluation as noted in the section Map Updates and Future Work.

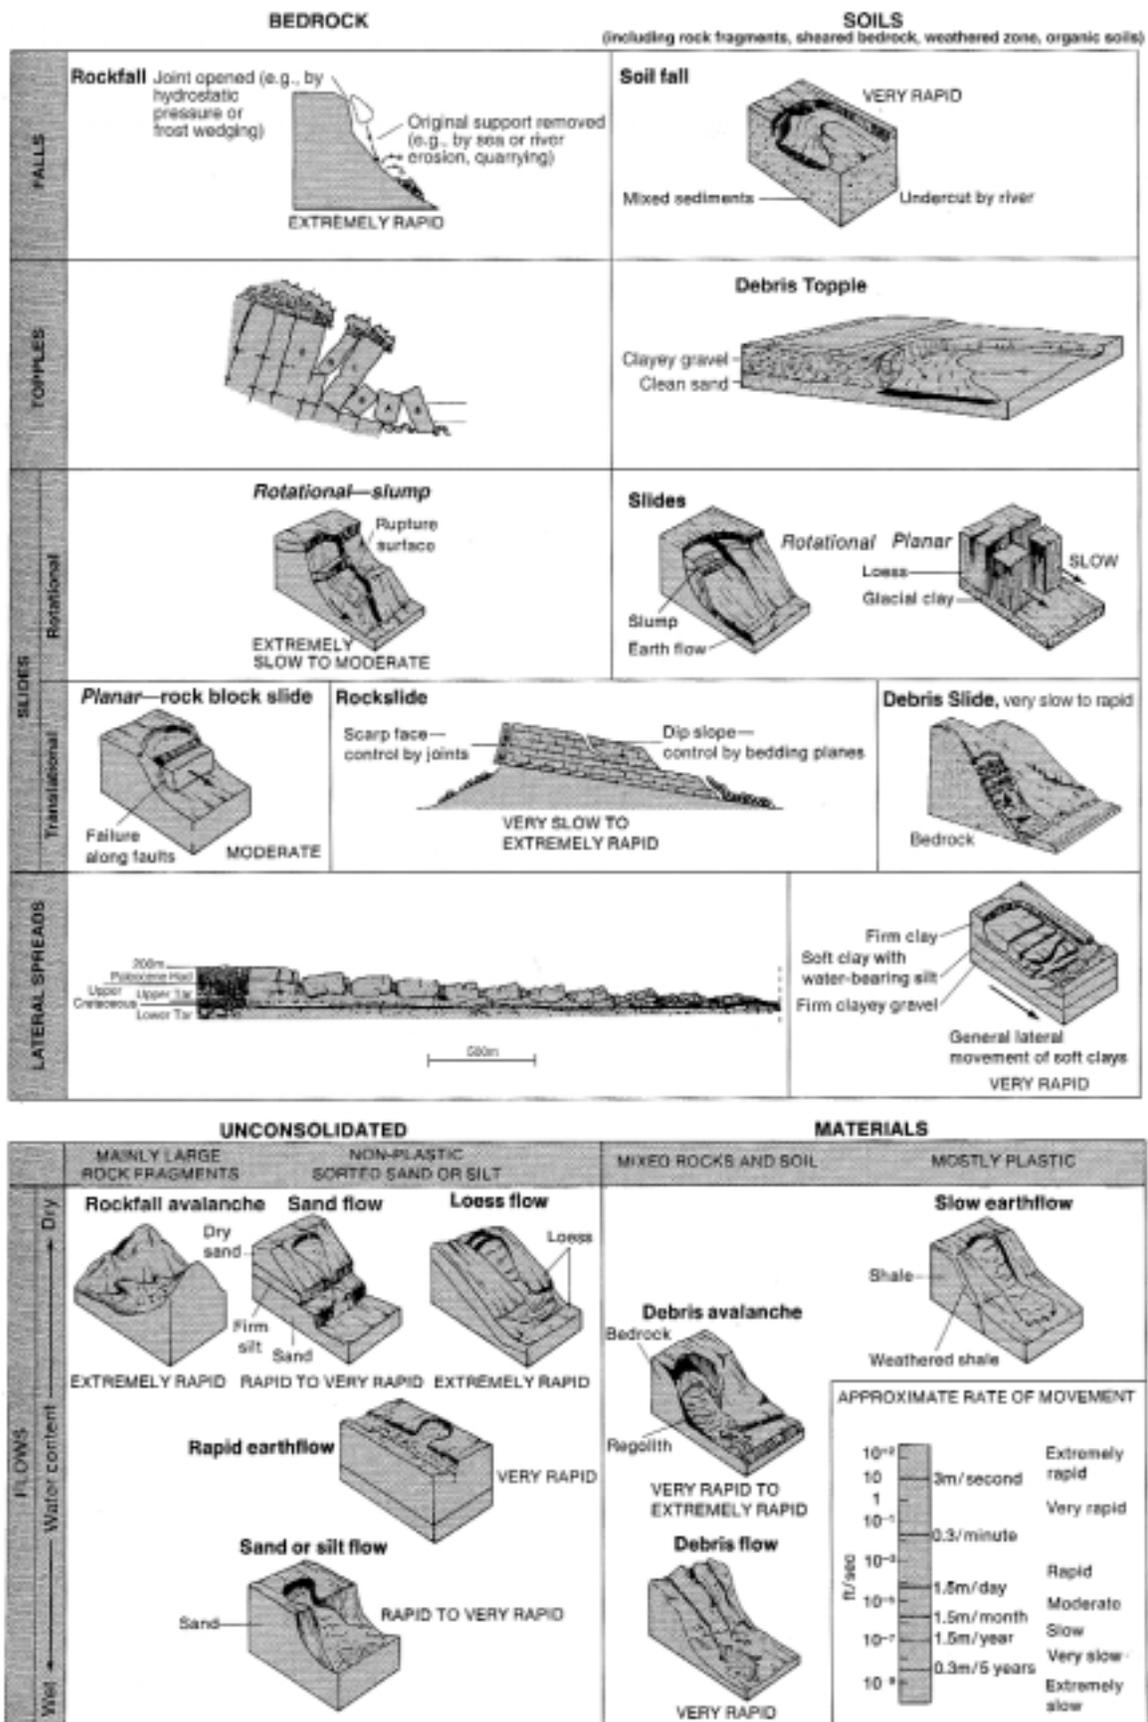


Figure 3. Landslide types. (From Ritter and others, 1995)



Figure 4. Rockslide that occurred along the Wilson River Highway (Hwy 6) in 1991. Though not a debris flow, this hazardous area is identified by the Further Review Area model. (Photo courtesy of Susanne L. D'Agnesse, Oregon Department of Transportation)

CHARACTERISTICS OF DEBRIS FLOWS

Debris flows, shown schematically in Figure 5 and by example in Figure 6, consist of water-charged soil, rock, colluvium, and organic material traveling rapidly down steep topography (Johnson, 1984). Debris flows are often triggered by small landslides (Figure 7) that then mobilize and grow to be large flows, entering and scouring stream channels downslope (Figure 8). When momentum is eventually lost, the scoured debris is often deposited as a tangled mass of boulders and woody debris in a matrix of finer sediments and organic material (Figure 9).



Figure 5. Diagram of a debris flow showing zones of initiation (source areas), transport, and deposition. (From Pyles and others, 1998)

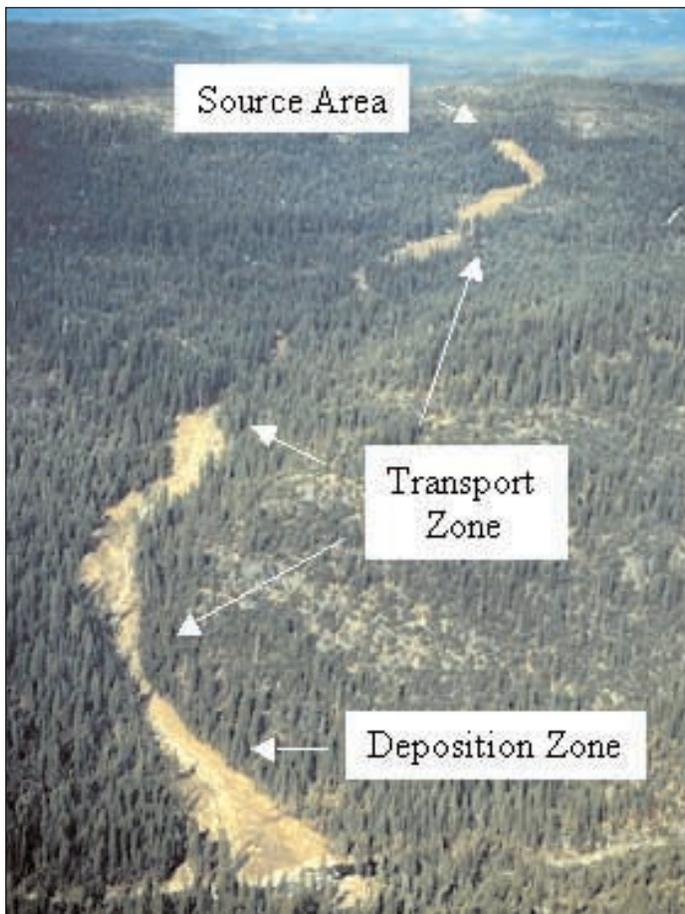


Figure 6. Photo of a debris flow showing zones of initiation, transport, and deposition. (Photo courtesy of U.S. Geological Survey)

Although debris flows can be extremely variable and chaotic, they have some common characteristics. These characteristics form the basis of much of our scientific understanding and provide the keys to identifying and modeling potentially hazardous locations. Before describing the development of the hazard map, therefore, useful background on factors that affect debris flow potential is provided.

For descriptive purposes, it is helpful to segment debris flow paths into areas of initiation, transport, and deposition as shown generally in Figures 5 and 6. Some of the common debris flow causes (termed trigger events) are outlined below, followed by some of the significant factors affecting debris flow initiation, transport, and deposition. This section provides only a brief overview of the subject.

Trigger Mechanisms

Debris flows can be initiated in marginally stable slopes by a number of natural and unnatural disturbances. Because most steep slopes are near their point



↑ Figure 7.
Small initiating landslide.



➔ Figure 8.
Scoured transport zone.

↓ Figure 9.
Tangled debris flow deposit.



of equilibrium, failures can be the result of seemingly minor modifications. In a fundamental sense, modifications that lead to failures can be simply grouped into factors that (a) increase the gravity-driven forces acting downslope and (b) reduce the resisting forces acting to keep the slope in place (Figure 10). Multiple factors may be involved in triggering any given debris flow.

Natural events that can induce failures include high-rainfall storms, rapid snow melt, earthquake shaking, breach of landslide or other natural dams, and volcanic eruptions (Wieczorek, 1996). By far the greatest number of debris flows that have occurred in Oregon (at least in historical times) have been associated with severe rainfall and rain-on-snow storm events.

Severe Rain Storms

High-precipitation storms can trigger slope failures through a number of mechanisms. Water infiltration into zones of weakness can trigger failures by (1) reducing the frictional resistance to sliding, (2) increasing pore pressures within a slope mass, and (3) adding weight (through saturation of the soil mass) (Turner and Schuster, 1996). Typically, all three of these mechanisms combine during long-duration, heavy-precipitation storm events to trigger widespread slope stability problems. During three 1996/97 storm events, for example, thousands of landslides (including many debris flows) were triggered throughout western Oregon (Figure 11).

Given the importance of rainfall events for slope failures, it is not surprising that a number of studies have focused on evaluating relationships



Figure 10. Schematic of a slope, showing driving and resisting elements.

between storm characteristics and debris flow occurrences (e.g., Campbell, 1975; Crozier and Eyles, 1980; Keefer and others, 1987; Cannon, 1988; Wieczorek and Sarmiento, 1988; Wilson and Wieczorek, 1995; Wilson,

1997; Wiley, 2000). Several of these studies have focused specifically on identifying rainfall thresholds above which landslides (and particularly debris flows) become significantly more widespread and numerous (Keefer and others, 1987; Wilson and Wieczorek, 1995; Wilson, 1997; Wiley, 2000).

One rainfall threshold study that used storm data specifically from the Pacific Northwest was reported by Wiley (2000). This study included evaluations of climatic data in comparison with landslide occurrences recorded for the period of February 1996 through January

1997 and indicated that widespread landslide activity in steep terrain throughout western Oregon is likely to be triggered by rainfall intensity/duration combinations of (a) 40 percent of mean December rainfall in a 24-hour

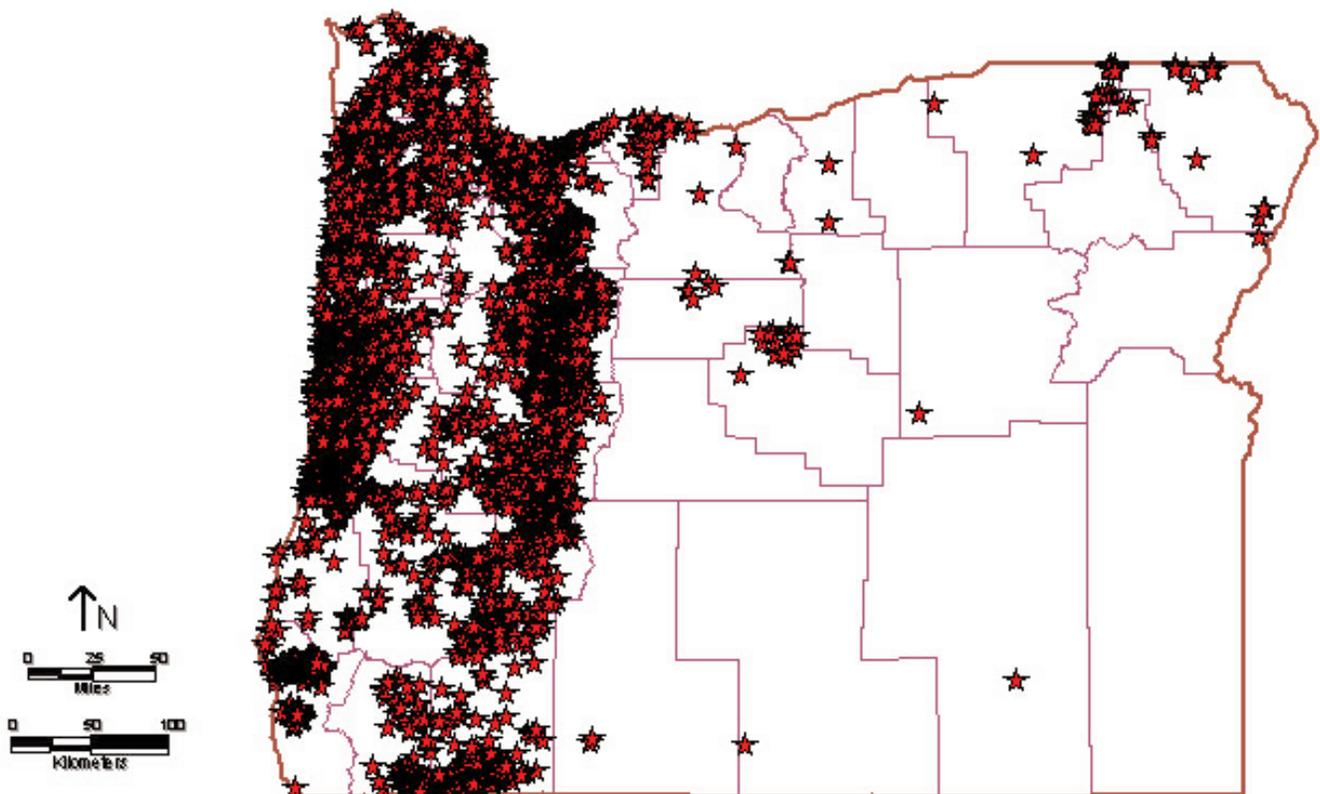


Figure 11. Distribution of the more than 9,500 landslides triggered in Oregon by the storms of 1996-97. (From Hofmeister, 2000)

time period, (b) 25 percent of mean December rainfall in a 12-hour period, or (c) 15 percent of mean December rainfall in a 6-hour period. Figure 12 is a map showing the general magnitude of the 24-hour rainfall thresholds in western Oregon. Storms that produce rainfall in excess of these levels are considered to be particularly prone to triggering dangerous landslides.

Slightly more conservative rainfall-threshold criteria are appropriately used by the Oregon Department of Forestry (ODF) for the Oregon Debris Flow Warning System (discussed in the section Risk Management Strategies). Thresholds of 3 in. in 12 hours, 4 in. in 24 hours, 5.5 in. in 36 hours, or 7 in. in 48 hours are used by ODF to issue debris flow advisories for forecast storms. As will be discussed in later sections, a number of important variables affect local debris flow occurrences, and no simple criteria can be used to precisely predict debris flows on a regional scale. Nevertheless, rainfall intensity studies and warning systems are important attempts to save lives by providing advance notice of impending events.

Human Actions

While large storms and other natural events beyond our control are often the prime triggers of landslides in the Pa-

cific Northwest, human actions resulting in adverse modifications to the natural environment can also be significant factors in causing and/or exacerbating slope instabilities. Many common artificial alterations to topography make slopes more vulnerable to landslides, and it is important to evaluate how human actions affect slope stability over both the short and the long term.

Modifications that alter the internal strength of slopes and the flow of water can adversely affect slope stability. Construction of roads, buildings, dams, and other infra-

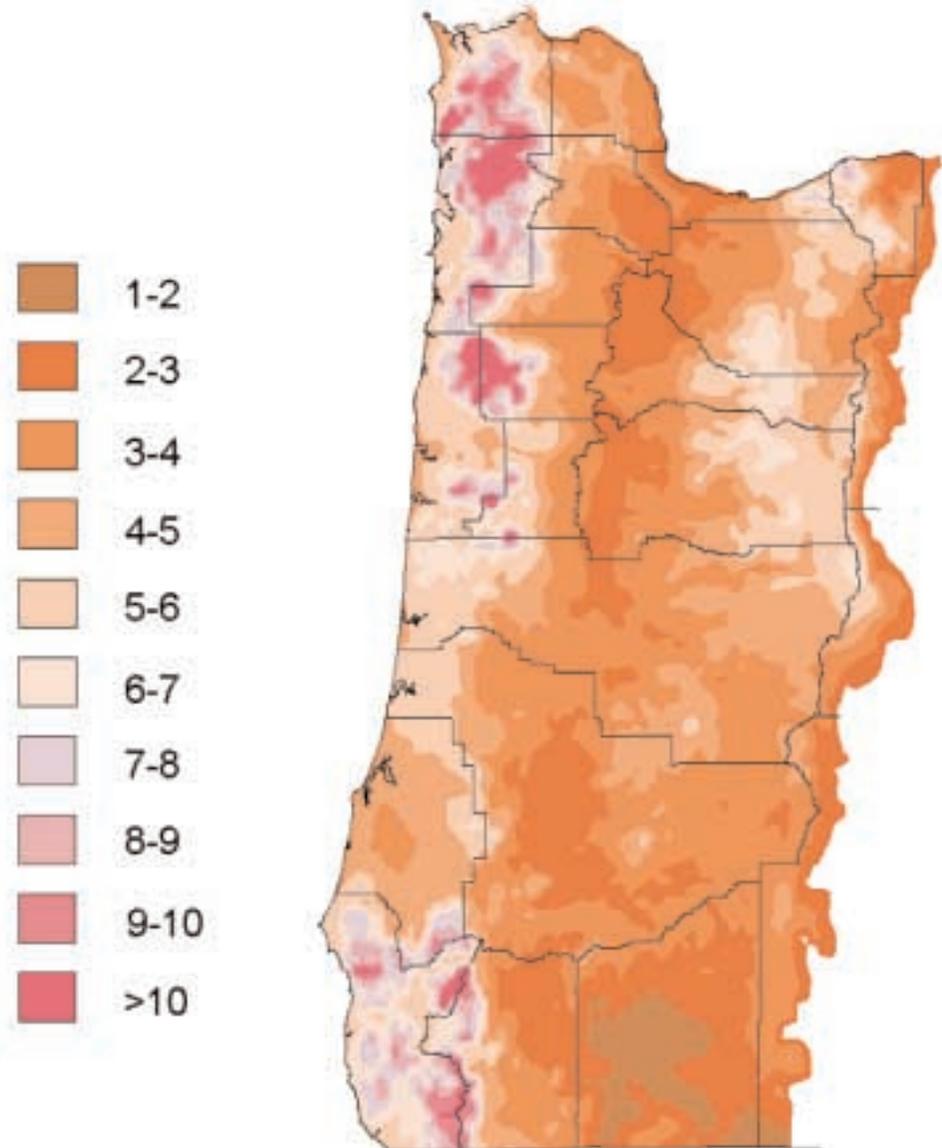


Figure 12. Map of estimated 24-hour rainfall intensity-duration thresholds in western Oregon. Contours are derived from the Oregon Climate Service data of mean December precipitation. (From Wiley, 2000)

structure typically involves earth movement and redirection of water. For example, surface paving that redirects water to hazardous areas, excavations that remove materials from the base of marginally stable slopes, and removal of vegetation on marginally stable slopes are a few of the more common factors that can increase the likelihood of slope failures.

In forested terrain, logging activities can also have a negative impact (Swanson and Dyrness, 1975; Sidle and others, 1985). Vegetation can stabilize slopes by binding soil masses together with roots and by affecting the distribution and rate of water flow through the system. It is difficult to quantify the effects of vegetation on the stability of a particular slope, but removing vegetation increases susceptibility for slide initiation in most cases (Burroughs and Thomas, 1977; Sidle and others, 1985; Robison and others, 1999). In addition, logging practices that leave loose material in debris flow paths can significantly increase the size and downslope impact of flows.

Redirecting water, excavations, and vegetation removal are only a few of the many actions that can adversely affect the stability of slopes in steep terrain. Other common human actions that cause or exacerbate slope instability may be loading slopes (e.g., with buildings or equipment), replacing natural materials with lower strength materials (e.g., nonengineered fill), and removing soil reinforcement.²

Debris Flow Initiation

In addition to triggering mechanisms, a number of related factors must be considered in assessing the potential for debris flow initiation. For regional hazard evaluations in particular, topography and other inherent physi-

cal parameters are often the focus, such as slope steepness, landform (concave, convex, planar), rock and soil properties, hydrology, and type and extent of vegetative cover. Short descriptions and useful references for each of these factors are provided below.

Slope Steepness

Although not all steep slopes are unstable, steeper slopes tend to be less stable, other conditions being equal. Many studies have corroborated and quantified this fundamental tenet (Wieczorek and others, 1988; Millard, 1999; Robison and others, 1999; Vaugeois and Shaw, 2000). For example, in a recent study by ODF, no debris flows in the study areas were initiated on slopes below 40 percent steepness, with slopes measured directly in the field. Most of the landslides (86 percent) were initiated where slope steepness was measured to be over 70 percent (Robison and others, 1999).

Landform

Landform has an impact on slope stability (Figure 13). Sharply convergent (concave) slopes tend to develop thicker soil/colluvial deposits and are locations of concentrated

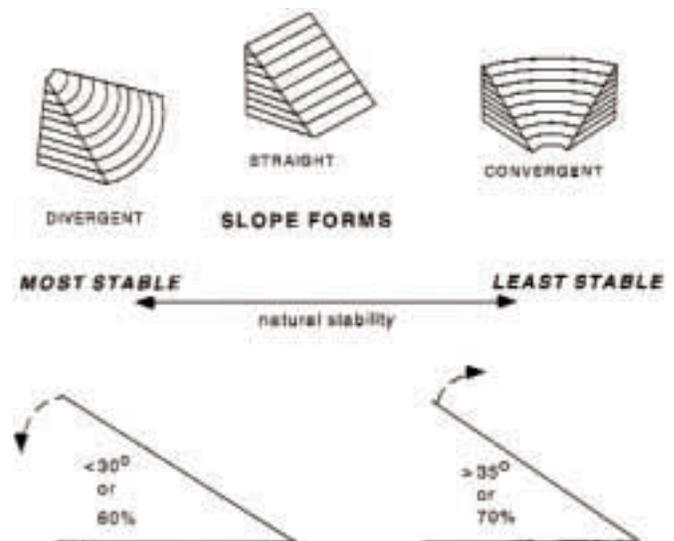


Figure 13. Schematic of divergent, straight, and convergent topography. (From Benda and others, 2000)

² More information and detailed descriptions of human effects, triggering mechanisms, and slope stability factors can be found in Turner and Schuster, 1996.

drainage (Dietrich and Dunne, 1978). Many studies report that such locations have higher landslide hazard than straight (planar) and divergent (convex) slope forms (Tsukamoto and others, 1982; Reneau and Dietrich, 1987; Benda and Cundy, 1990; May, 1998; Millard, 1999). While landslides do occur on slopes with no apparent distinctive landform, convergent landforms tend to have a higher landslide occurrence in western North America.

Rock and Soil Properties

Properties of geologic materials can exert important control on the stability of slopes. Rock joints, bedding planes, and other discontinuities typically display lower strength than a continuous rock mass, sometimes lower than the strength of weathered soils. These discontinuities can also affect the flow of water through a slope and can lead to high, localized water pressures. Studies by Swanson and Lienkaemper (1985), Wieczorek and others (1988), Rollerson and others (1997), and Millard (1999) have shown that landslides occur predominantly in certain rock and soil types.

Hydrology

The influence of water in initiating and affecting the geometry of landslides is well documented (Pierson, 1980; Reneau and Dietrich, 1987; Iverson, 2000). As explained in the section Trigger Mechanisms, most debris flows are initiated during or shortly after large storms. Storm runoff can produce substantial erosion and in some cases can be the primary mechanism for initiating a debris flow (Wells, 1987; Cannon, 1997). More commonly, however, subsurface water flow concentrates in marginally stable areas and contributes to debris flow initiation through increased water pressure and saturation of soil horizons (Iverson, 1997). In the long term, water can also contribute to decreased slope stability through natural weathering processes,

including both chemical and physical breakdown of rock and soil.

Vegetation

Both vegetative type and cover (how much and where it is located) can significantly affect landslide initiation potential. Many debris flows begin in small, nonvegetated pockets of soil, and substantial research has focused on evaluating the role of vegetation in forestland stability (Burroughs and Thomas, 1977; Dietrich and Dunne, 1978; Ziemer, 1981; Reneau and Dietrich, 1987; Montgomery and others, 2000).

The factors mentioned in this section are interrelated. Although other factors can also be critical in evaluating the stability of particular sites, the factors listed above are the most commonly used in landslide hazard modeling efforts. Based on research into these factors, regional and site-specific models have been developed to address potential landslide initiation (e.g., Ward and others, 1978; Burroughs, 1984; Hammond and others, 1992; Montgomery and Dietrich, 1994; Carrara and others, 1997; Fannin and others, 1997; Rollerson and others, 1997; Wilkinson and Fannin, 1997; Pack and others, 1998; Vaugeois and Shaw, 2000; Wu and Abdel-Latif, 2000). Reviews of the various types of initiation hazard modeling approaches are included in Swanson and Dyrness (1975), Sidle and others, 1985, Montgomery and Dietrich (1994), Carrara and others (1997), May (1998), Montgomery and others (2000), and Vaugeois and Shaw (2000).

Transport

Since most debris flows begin as relatively small events, the factors that cause these small landslides to become large, rapidly moving debris flows are of critical importance. Essentially, any factor that contributes to developing momentum from the onset of a landslide will contribute to the transport po-

tential. This includes characteristics of the slide mass itself (such as mobility, hydrology, mass composition) and of the travel channel (such as gradient, confinement, roughness, obstructions, junctions). The dominant factors include the presence (or absence) of a steep downslope travel path, the mobility of the initial landslide debris, the availability of additional debris, internal hydrologic characteristics of the slide mass itself, confinement of the channel, and the presence of wood and other organics (Johnson, 1984; Davies, 1997; Iverson and others, 1997).

A steep downslope travel path and the mobility of the initial landslide debris are considered the most significant factors affecting the initial stages of debris flow movement (Campbell, 1975; Corominas, 1996). As debris flows travel further downslope, other factors combine to affect the potential for continued travel or loss of momentum and subsequent deposition. The availability of additional debris along the path can lead to extensive increase (bulking) of the slide mass and, if slopes continue to be steep, can greatly increase momentum. Internal hydrologic characteristics of the slide mass also affect its mobility (Ellen and Fleming, 1987; Iverson and LaHusen, 1989; Iverson, 1997).

Confinement is a term that refers to narrow, steep-sided channels for slide-material transport. Debris flows that travel through confined paths tend to travel farther than those on open slopes (Fannin and others, 1997). Concave landforms such as swales, channels, or draws can funnel debris flows and keep their energy from dissipating. Thus, confined stream channels and the outlets of canyons can be particularly dangerous locations during debris flow events.

Wood and other organic materials can substantially affect debris flow behavior and are common in flows in the Pacific Northwest (May, 1998; Johnson and others, 2000). Wood material often accumulates at the front of de-

bris flows and can greatly affect debris flow transport paths and distances. In some cases, when trees are lodged in confined areas, small debris flows can be stopped. In other cases, large pieces of wood can act to increase momentum or function as battering rams along transport paths (Fred Swanson, written communication, 2002).

Modeling debris flow transport typically involves the use of simplified rules for determining when a flow is likely to continue traveling downslope or instead will lose momentum and deposit its mass. These rules are often based on empirical observations of conditions associated with transport on the one hand and deposition on the other. Earlier models that address debris flow transport include those by Hungr and others (1984), Benda and Cundy (1990), Benda and Dunne (1997), Fannin and others (1997), and Iverson and others (1998).

Deposition

As debris flows eventually lose momentum they form single or multiple deposits. Many of the same factors that affect transport, including channel gradients, channel roughness (or friction), channel confinement, obstructions, channel junctions, and material properties of the flow, determine when and where deposition will occur (Benda and Cundy, 1990; Fannin and Rollerson, 1993). The onset of deposition is controlled by factors that slow down and/or obstruct debris flow movement.

Where channel gradients decrease and flows lose channel confinement, debris flows typically spread out and quickly lose momentum. Once a flow is no longer in steep scour zones, obstructions (including large rocks, levees, standing trees, etc.) can also reduce momentum and cause the flow to cease movement. Very sharp turns in the debris flow path can also cause them to stop. Sharp turns in stream channel networks often occur

at high-angle channel junctions (Swanson and Lienkaemper, 1978; Benda and Cundy, 1990).

The characteristics of debris flows in deposition areas are highly variable, particularly when confinement is abruptly lost. The size and material properties of the flow influence size and shape of its mass over the topography in the deposition zone. Large debris flows with high water content and relatively uniform grain size tend to spread out substantially and form relatively thin and broad deposits (Figure 14). Less saturated debris flows tend to form thicker, shorter deposits (Figure 15). These thicker deposits are more common with open-slope (versus channelized) failures that are not fully saturated (Major, 1997).

Debris flows are often deposited in several surges or pulses of activity (Iverson, 1997; Major, 1997; Mohrig and others, 1998). In some cases, the surges may be attributed to multiple upslope failures initiating the debris flows. In other cases, they are attributable to inherent instability within the moving mass.

Subsequent floodwaters, particularly in cases of channelized debris flow deposition, may erode and redistribute the deposited debris (Benda, 1988; Costa, 1988). Under such conditions, a deposit can be created that consists of a sequence from debris flow to hyperconcentrated flow to flood, with gradual transitions. Figure 16 shows a schematic diagram of such an event. The downslope floodwaters are not likely to exert the extreme impact forces of large debris flow surges, but can still be extremely damaging.

From this overview of contributing factors, one can see that predicting and modeling debris flow deposition is a difficult task, particularly for regional applications. Some researchers have focused on this important aspect of landslide hazard assessment, notably Cannon and Savage (1988), Cannon (1989), Ellen and others (1993), Hirano and others (1997), Morgan and others (1997), Nakagawa and Takahashi (1997), Iverson and others (1998), Campbell and Chirico (1999), and Hungr (1999).

Figure 14.
Fine-grained fan deposit in the Dodson/Warrendale area.





Figure 15. Unchanneled debris flow deposit.

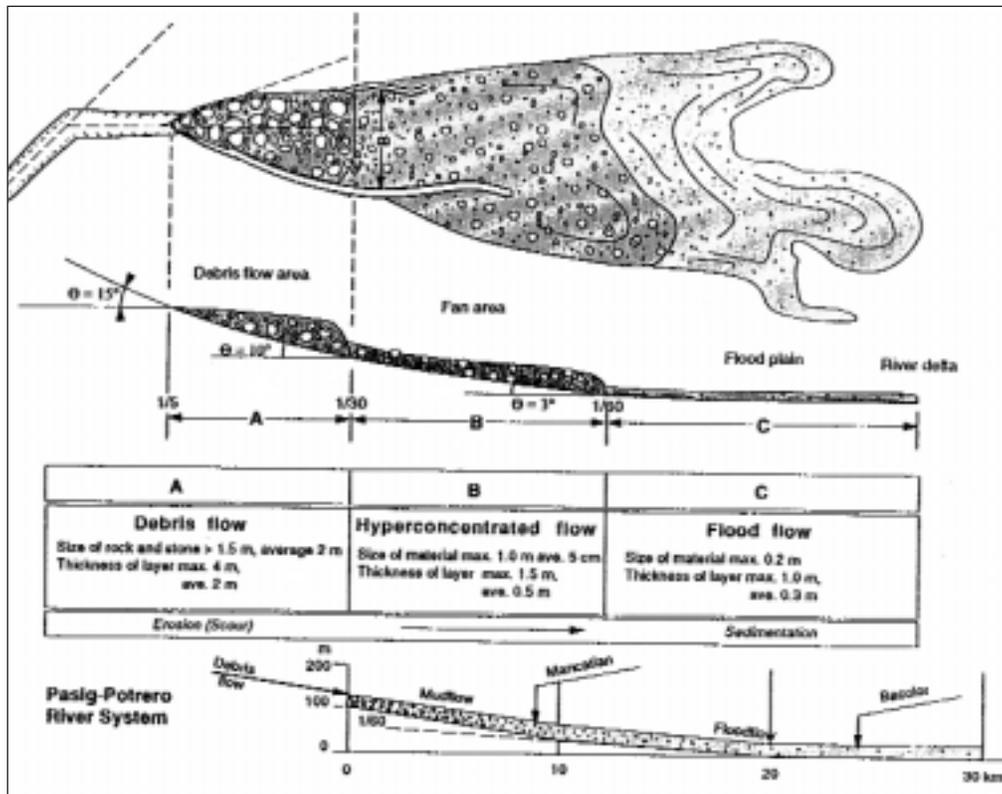


Figure 16. Schematic of transition from debris flow to hyperconcentrated flow to flooding. (From United Nations, 1996)

HAZARD MAPPING OVERVIEW

The debris flow characteristics described in the previous section form the basic information used for various hazard-modeling approaches. In essence, the general objective of hazard modeling is to break a phenomenon down into its governing processes. All modeling is a simplification of reality, but effective models accurately reflect fundamental components of the process being modeled.

For evaluating regional landslide hazards specifically, various qualitative and quantitative tools and modeling approaches are used. Typical methods used to assess debris flow hazards include aerial photo interpretation, landslide inventory comparisons, Geographic Information System (GIS) modeling, and field evaluations. There are significant advantages and also significant limitations to the use of each of these methods of evaluation. For example, aerial photo interpretation can be quite efficient in identifying unstable terrain over large areas, but can miss critical sites because of forest cover or scale limitations. Similarly, GIS modeling is uniquely suited for regional implementation, but applications are dependent on the quality and availability of input data. Field observations and inventory data comparisons can also be limited by scale and access constraints.

The overall SB 12 mapping objective was to maximize the strengths and minimize the weaknesses of each of these tools to produce the most useful and accurate map possible. We used an iterative process (shown schematically in Figure 17) that included multiple phases of GIS screening, field data collection, inventory comparisons, and peer reviews. Our overall goal was to develop a map that provided the best spatial match with each reliable source of data available on areas

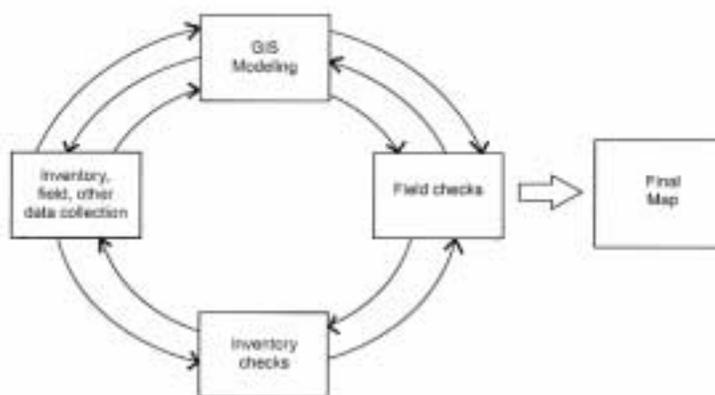


Figure 17. Schematic of the iterative process used to develop the map.

of historic occurrence and likely future impact zones. The following sections describe the main procedures used to develop the map.

Initial GIS Modeling

The first step was to develop an initial GIS model to serve as a guide for more detailed hazard mapping. The initial modeling was done by ODF and essentially involved highlighting steep slopes based on 30-m U.S. Geological Survey (USGS) Digital Elevation Models (DEMs). ODF completed and released the initial GIS layers in December of 1999.

Targeted Field Investigations

The initial ODF GIS output was used to select areas as targets for field investigations of debris flow transport and runout zones. The primary intent of the initial stage of field investigation was to identify areas where we could use geologic evidence to evaluate the extent of historic deposition. The presence or absence of historic debris flow activity can be valuable for evaluating future hazards because many debris flows occur at, or very near, previous flow sites. A diagram of some of the geomorphologic features that can help identify areas of historic debris flow occurrence is shown in Figure 18.

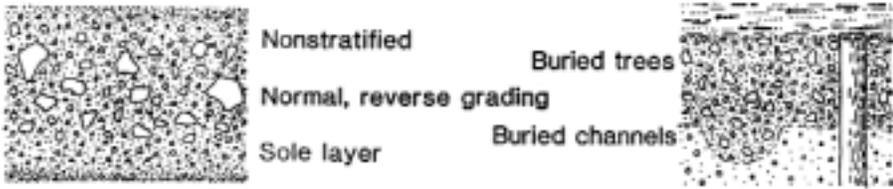
<p>STRATIGRAPHIC</p>	 <p>Nonstratified Normal, reverse grading Sole layer</p> <p>Buried trees Buried channels</p>			
<p>SEDIMENTOLOGIC</p>	<p>Closed, interlocking structure Matrix between clasts Vesicles</p>	<p>Coarse grain size < 10 - 15% silt & clay</p>	<p>Extremely poor sorting 3.0 - 6.5Φ (2.0 - 4.0Φ)</p>	<p>Fine skewed distribution</p>
<p>MORPHOLOGIC</p>				
<p>BOTANIC</p>				

Figure 18. Geomorphic features that can aid in the identification of historic debris flows. (Diagram courtesy of Tom Pierson)

Both the Oregon Departments of Geology and Mineral Industries (DOGAMI) and ODF performed these targeted field investigations. Geographically distributed (and geologically diverse) areas were evaluated as shown in Figure 19. In these areas, reconnaissance-level field investigations were conducted. Where geologic evidence clearly defined the extent of historic debris flow deposits, boundaries were mapped. More commonly, the geologic evidence was discontinuous or otherwise inconclusive. In these cases, field investigations focused on a general rating of terrain for high versus low relative debris flow hazard.

Improved GIS Modeling

During and following the initial field mapping, a variety of GIS models that could aid in the SB 12 mapping effort were evaluated.

Our focus was on identifying a suitable modeling framework to delineate the range of debris flow hazards observed in the field, including initiation, transport, and deposition. While numerous models have been developed for evaluating initiation potential, fewer have focused on the transport and deposition hazards – areas that are critical for impact and public safety.

In a general review of modeling approaches and available models, a modeling framework developed by the Earth Systems Institute (ESI) was selected. The ESI program uses mainly topographic data (DEMs) to model initiation, transport, and deposition zones. In the case of the SB 12 implementation, in particular, we developed the three-part framework as follows:

For initiation, steep slopes are used as the

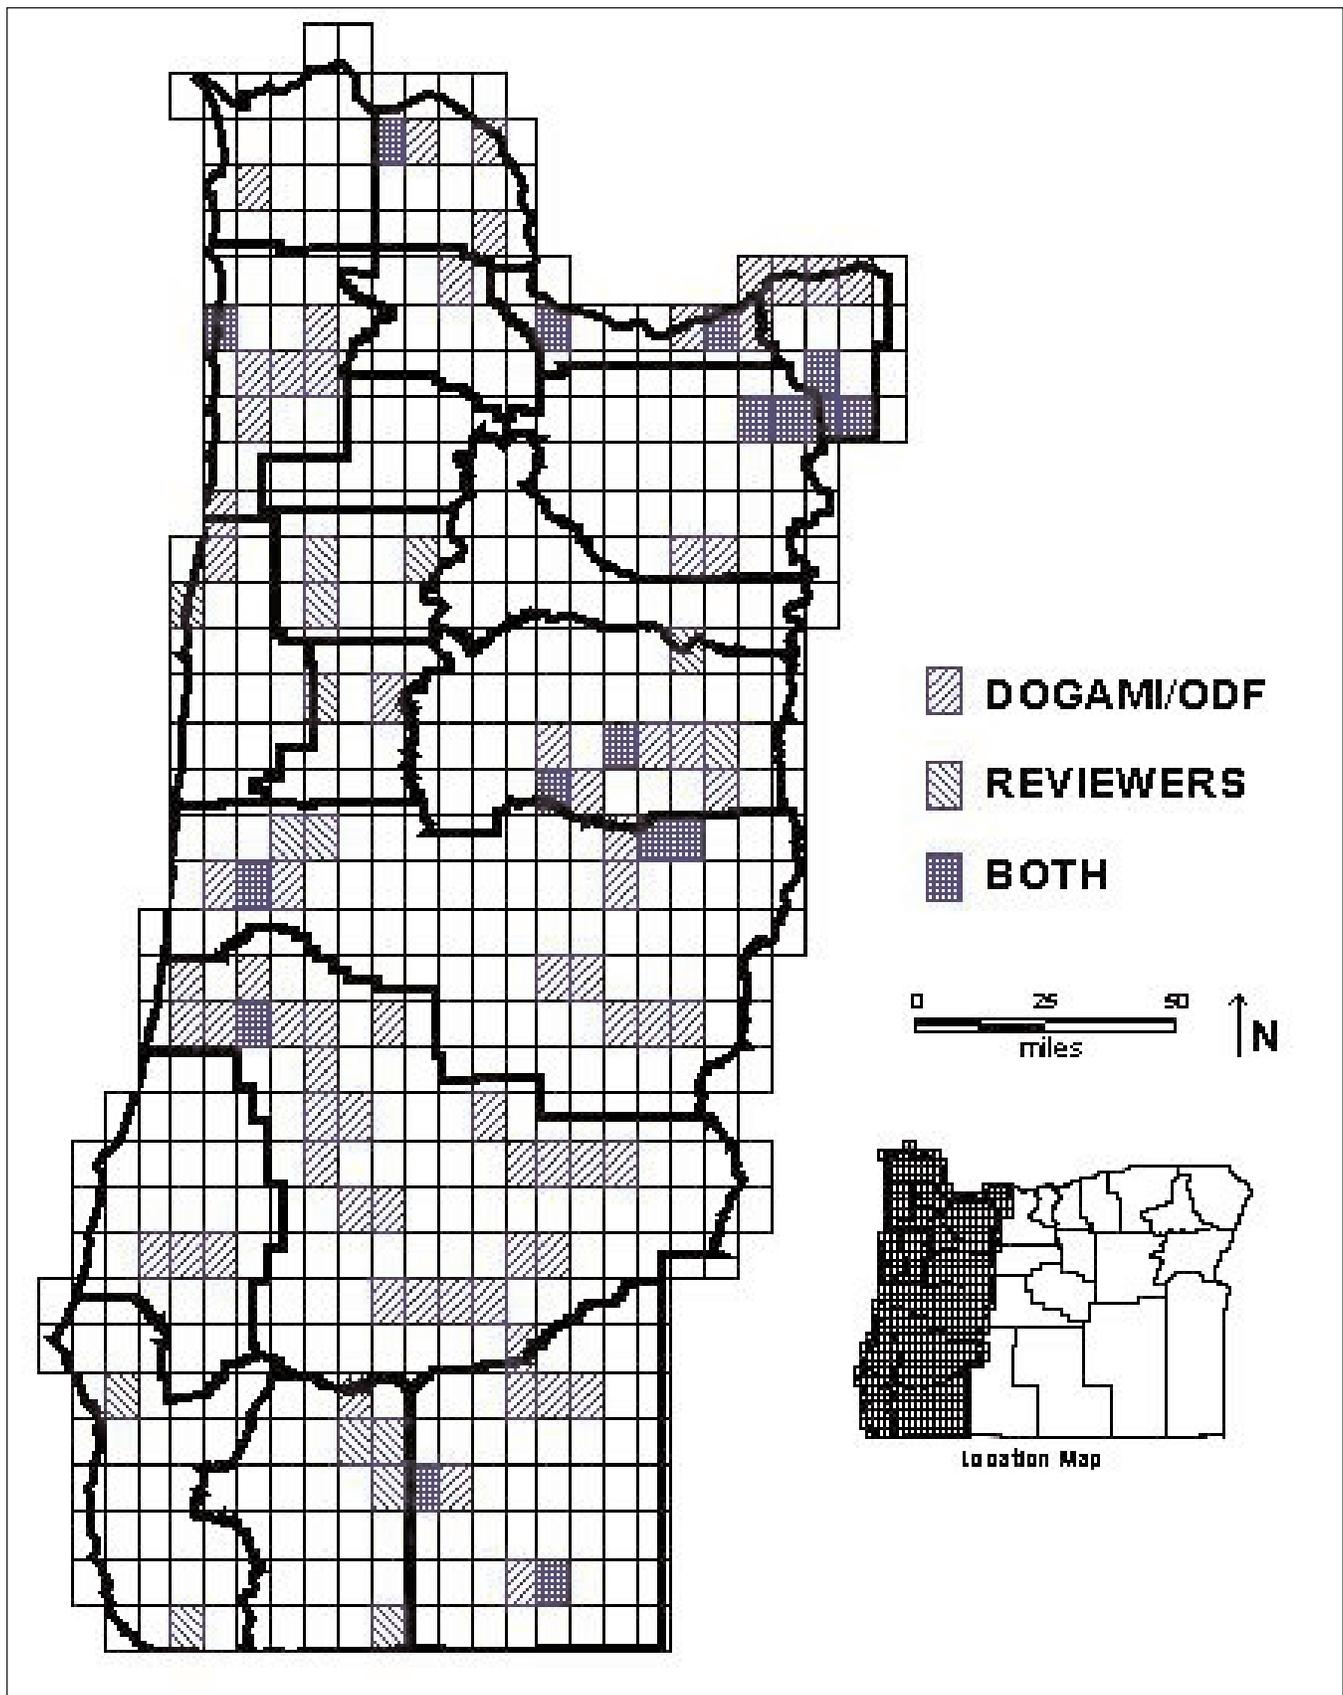


Figure 19. Map showing areas where field investigations were performed for this study. Shading identifies investigators for those 7 1/2-minute topographic quadrangles within which investigated areas were located.

basis for distinguishing potentially unstable sites.³

For transport, each potential initiation site (determined by a specified slope threshold) is routed downslope according to rules that incorporate a number of factors, including slope gradients and topographic confinement. If a path is steep, the failure will continue to travel and will accumulate more material. If the path gradient drops substantially and loses confinement, the mass begins to settle as a deposit.

Once deposition begins, a modeling approach developed originally by the USGS for volcanic hazards (Iverson and others, 1998) and adapted for debris flow modeling (Griswold and Iverson, 2002) is used to predict the spread of the accumulated debris.

The input parameters used in the model are summarized in Appendix B, and specifics on the algorithms are provided in Miller (2002). Significant advantages of the ESI modeling approach are a straightforward and logical framework, flexible parameter selections to account for varying conditions, and presentation of relative hazard indices. The following sections discuss refinements and calibrations of the model as we made them specifically for this SB 12 project.

Qualitative and Quantitative Testing

The ESI program immediately produced map results that were a good spatial fit with the field notes and inventory data. However, as with any regional GIS model, it is critical to test and refine the results. In this case, our main objective was to get the best match between the GIS model output, the debris flow inventory data, and our field observations. In the SB 12 implementation of the ESI model, we started by testing parameters for use in evaluating initiation susceptibility, then progressed to selecting specific transport and deposition parameters.

³ The ESI program can implement other proxies for initiation potential such as Shalstab (Montgomery and Dietrich, 1994) or SMORPH (Vaugeois and Shaw, 2000).

Initiation Comparisons

To evaluate and select a model for debris flow initiation potential, we performed a quantitative comparison of a consolidated inventory of debris flow locations and common initiation hazard indices, including slope gradient, topographic convergence, and topographic contributing area. We evaluated the appropriateness of each hazard index by comparing the number of historic landslides to the total area mapped by the hazard selection.⁴

On the basis of the inventory comparisons described more fully in Hofmeister and Miller (in preparation), slope gradient alone (versus slope plus convergence or slope plus contributing area) was selected for use in the Further Review Area mapping. Slope gradient alone is the simplest of the initiation indices, and the number of landslides identified per mapped area was actually slightly higher than the number captured by the other indices.

A plot of the percentage of landslides in the inventory captured by various slope cutoffs is provided as Figure 20. Also shown is the percentage of the total western Oregon study area covered by each slope value and higher (e.g., 10-m DEM-derived slopes of greater than 50 percent comprise approximately 20 percent of western Oregon). From Figure 20, one can compare various selections of cutoffs in terms of historic debris flows identified versus total areas that would be mapped by the cutoff selections. The three distinct curves labeled 0 m, 15 m, and 31 m represent different buffer spacing selections used to compare debris flow initiation locations to slope values. The purpose of the buffer spacing selections is to address spatial uncertainty in the inventory locations as discussed more

⁴ Models were compared as to how many landslides the index identified. A model that identifies a high number of landslides in a small mapped hazard area is considered preferable to one that captures fewer landslides in the same amount of hazard area or requires more mapped area to identify the same number of landslides.

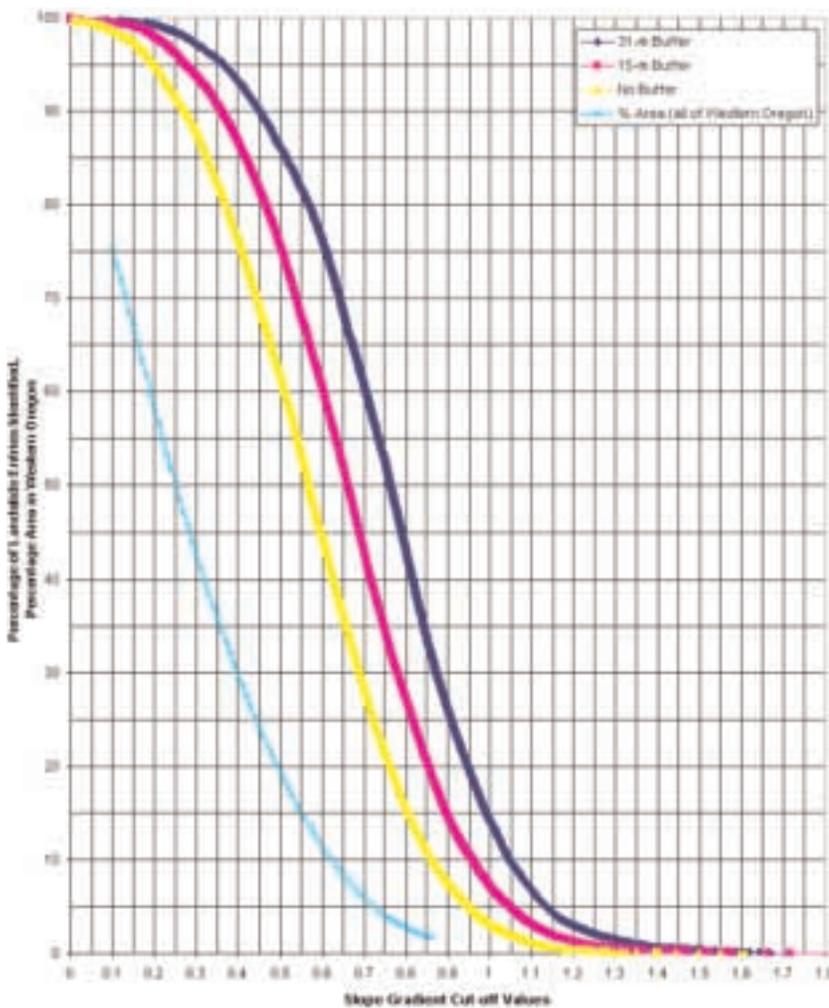


Figure 20. Percentage of landslides identified by various slope threshold selections. (Adapted from Hofmeister and Miller, in preparation)

fully in Hofmeister and Miller (in preparation).

In order to capture a range of 60–85 percent of the known landslide locations, a 10-m DEM-derived slope gradient of 50 percent and higher was selected as the cutoff for defining initiation susceptibility. This is a lower threshold than that commonly used for field-based forestry applications, and a higher threshold than commonly used for local government landslide hazard ordinances. It is important to note that the threshold identified for this project was designed to balance the conflicting objectives of identifying as many future debris flow initiation sites as possible while minimizing the area affected. Also,

while the specific hazard targeted was debris flow initiation, other types of landslides can occur, particularly on gentler slopes.

Path and Deposition Comparisons

To test and calibrate the path and deposition parameters, we primarily used comparisons with field observations and inventory data that included transport and deposition zones. We ran the ESI model at various locations throughout the western portion of the state and then compared the outputs to field interpretations. The objective of these comparisons was to find correlations among (a) the hazard areas identified in the GIS outputs, (b) field-identified hazard zones, and (c) debris flow paths identified in the consolidated debris flow inventory.

The variability of debris flow transport and deposition across regional landscapes is well documented (Swanson and Lienkamper, 1985; Millard, 1999). While it was not feasible to calibrate the

modeling approach site by site in this study, it was possible to identify generalized relative hazard differences by physiographic region. Based on results from the test sites scattered throughout western Oregon, we selected four generalized provinces with which to separate relative hazard cutoffs. Figure 21 shows the generalized geographic separation. These regions were used to separate the final deposition cutoff selections (as summarized in Table 1) but were not used to modify either the initiation or transport parameters for this map.

Additional Field Checks

As we worked toward achieving high cor-

relation among existing data for our various test sites, we performed additional field checks and sent draft copies of the Further Review Area map to debris flow researchers for field verification. This allowed us to obtain ground observations in areas we could not have otherwise visited due to time and budget constraints. The field reviewers of draft maps are listed in Appendix C. The reviewers evaluated areas based on their particular field expertise, and the geographic distribution of those areas is shown in Figure 19.

Final Selection of Parameters and Map Generation

We made final refinements based on feedback from the draft reviewers and then proceeded to process the model for western Oregon. Due to the large amount of data and the detail of the programming operations, the map development necessitated di-

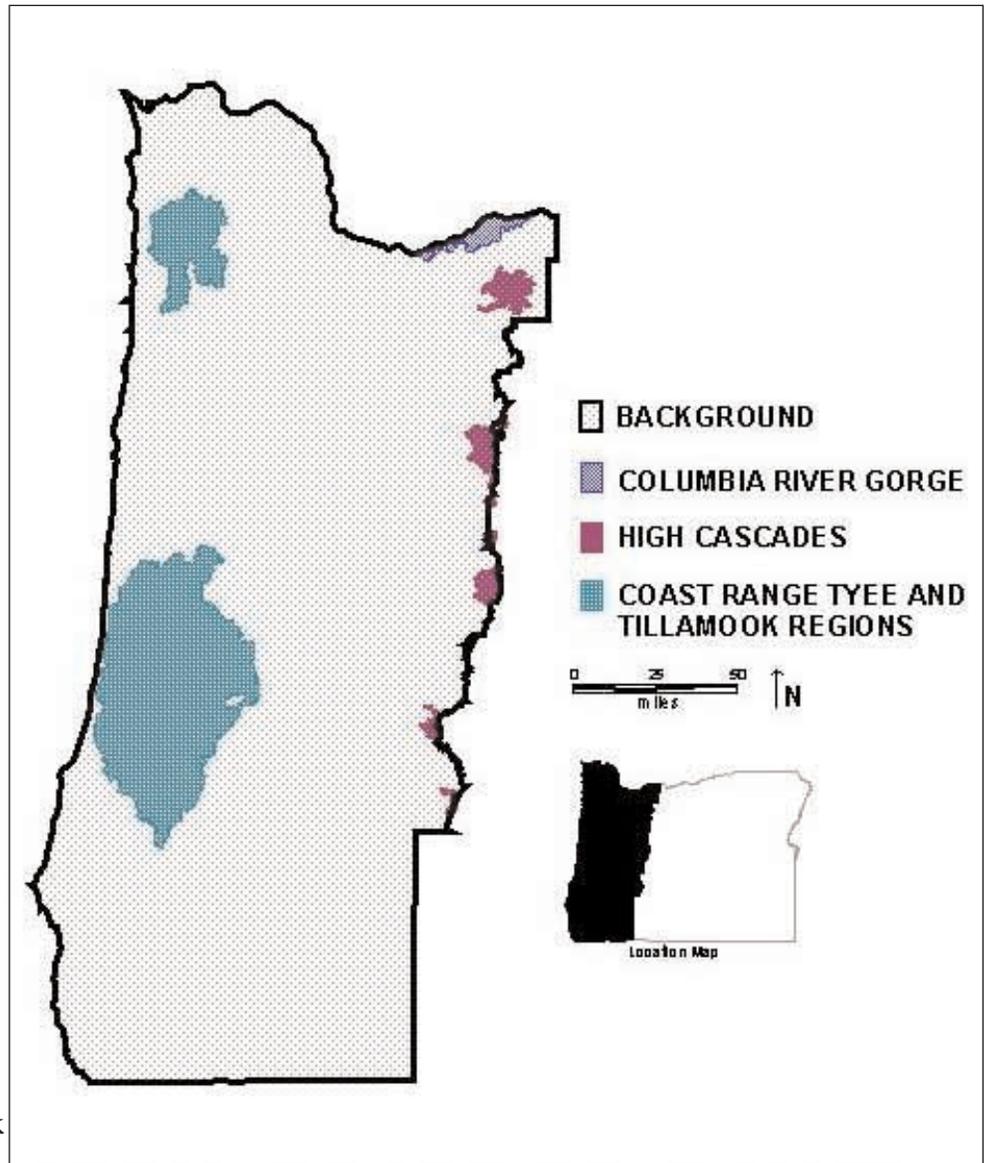


Figure 21. Generalized geographic separation used for selecting deposition hazard cutoff values.

viding the region into 149 sections. The model was processed on these sections (with a 3-km or larger overlap to eliminate negative

Table 1. Parameters used for defining deposition hazard zones

Geographic Designation	Cutoff Selected
Region 1 – Background	<100
Region 2 – High Cascades	<1000
Region 3 – Columbia River Gorge	<500
Region 4 – Coast Range Tyee and Tillamook	<50

edge effects) and stitched together at the borders.

As a final processing step, the output deposition hazard values were grouped to develop hazard zones as summarized in Table 1. The background cutoff of 100 was applied to the majority of western Oregon and was selected to create a relatively conservative, average-case zone that is intended to encompass the reasonable range of potential impact areas. It will be over-conservative in some case and under-conservative in others. On a regional scale, however, it should effectively serve the purpose of a screening tool.

The three other regions (High Cascades,

Columbia River Gorge, and Coast Range Tyee and Tillamook) include areas where regional hazard patterns varied markedly from the background case and thus warranted separate treatment. Glacial and volcanic effects lead to very large flows in the High Cascades. The steep, geologically young margin of the Columbia River Gorge on the Oregon side also generates anomalously large events (e.g., Robertson, 1996). And, on the other extreme, the extremely steep and highly dissected geomorphology of the Coast Range tends to produce frequent slides of smaller magnitude (Swanson and Lienkaemper, 1985).

MAP RESULTS AND DISCUSSION

Figure 22 shows the hazard zones for the City of Salem and the Dodson/Warrendale area in the Columbia River Gorge. As is evident from these two examples, the extent of the hazard varies substantially across western Oregon, with a large percentage of the Dodson/Warrendale region identified as a hazard and only a small area identified in the southwest corner of the Salem map.

The hazard map zones are stored as digital polygon files in a variety of GIS file formats. These digital files can be used as overlays on other relevant map information, such as zoning maps. It is important to note, however, that the Further Review Area map is intended for use with the 1:24,000-scale USGS topography and stream data. The model was derived from USGS 10-m DEMs, and, therefore, other coverages (particularly stream layers) derived from topography at other scales are unlikely to match. For higher resolution coverages, the fit may be acceptable in some cases, but any spatial data sets used for decision-making with the Further Review Area map should be thoroughly analyzed for compatibility.

As mandated by SB 12, the Further Review Area map is composed of only two zones of hazard. A particular map location is, therefore, simply inside or outside the Further Review Area zone. The areas of highest hazard

are typically near channel mouths or close to the base of very steep slopes (Figure 23). From the outlets of channels and the base of steep slopes, the hazard typically decreases with distance from the source as shown schematically in Figure 24. While the directive for the SB 12 map specified the use of a single zone of hazard, it is important to note that the hazard, while consistently high, is gradational and is not uniform within a Further Review Area.

Areas Affected

While the map covers 19 western Oregon counties (Figure 25), the amounts of area impacted in each county differ considerably. Figure 25 includes the percentage area in each county covered by Further Review Area zones. Within the counties, much of the Further Review Area is confined to localized steep areas, mostly on federal, state, and private forestland. For example, 58 percent of Josephine County is zoned as a Further Review Area (the highest of the 19 western Oregon counties). Although a large portion of that area is steep terrain that is extremely dangerous for debris flows, much of it is sparsely inhabited, publicly owned forestland, where development will not be affected by SB 12. To illustrate this, the breakdown of

Table 2. Further Review Area breakdown by ownership* in Josephine County

Ownership	Percent of total County acreage owned	Percent of owned acreage mapped as Further Review Area	Percent share of total County Further Review Area acreage
USDA Forest Service	39	70	47
US Bureau of Land Management	28	67	33
Private	32	36	19
State land and Oregon Caves Monument	1	67	1

* Ownership data are estimates and were derived from regional GIS layer owner.shp from the Oregon Geospatial Data Clearinghouse, <http://www.gis.state.or.us/>.

the Further Review Area designation by general land ownership is shown for Josephine County in Table 2. While approximately 68 percent of Josephine County is in the public domain, it accounts for more than 80 percent of the total mapped Further Review Area in the county. Alternatively, approximately 32 percent of the county is privately owned and accounts for less than 20 percent of the Further Review Area in the county.

Quantification of Hazard Designations

For application of the map, it is helpful to evaluate how the hazard zones quantitatively relate to known occurrences of debris flows. Debris flows often recur at or very near the same locations. Therefore, comparing the map results with information on historical debris flow locations is a useful means of evaluating the reliability of a hazard map. Use of the existing inventory data to estimate



Figure 22. Output examples for the City of Salem (above) and the Dodson/Warrendale area.

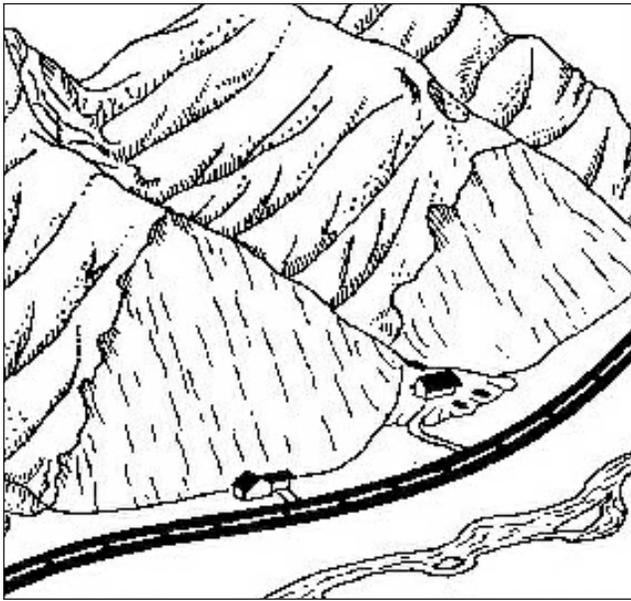


Figure 23. Typical highest hazard home locations: near channel mouths and at the base of very steep slopes. (Illustration courtesy of Oregon Department of Forestry)

future landslide hazards leads to a capture rate that for the current map is expected to be roughly within the ranges summarized in Table 3.

For the initiation portion of the model, the estimated performance of the hazard designations is based on the percentage of historic landslides identified by each slope cutoff value in the previously mentioned inventory comparison (Figure 20). Extrapolating these data to future time periods and storms, the Further Review Area slope threshold of 50 percent is roughly estimated to capture between 65 percent and 85 percent of the landslide initiation sites.

For transport evaluation, we cannot con-

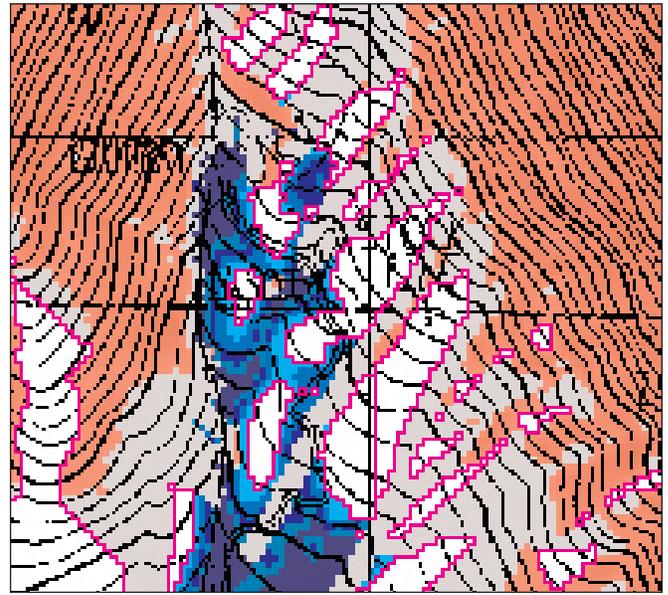


Figure 24. Example of gradation within a high hazard Further Review Area. Darker shades signify higher relative hazard. Initiation areas are in red; transport areas in gray; and deposition areas in blue.


duct as detailed a comparison of map areas and lines because of limited path data, and additional spatial uncertainties. In general, however, we expect the capture of debris paths to be similar or better than the initiation areas. We expect this because, within the model (and in reality), slope failures from multiple sources tend to coalesce into a smaller number of drainage paths (Figure 26). Thus, if steep upslope areas are identified as hazards, and the gradients are sufficient for the model to assume transport, the downslope drainage path will be included as a potential hazard.

Similar to the initiation comparison, we compared a consolidated GIS inventory of

Table 3. Summary of predicted capture rates for the Further Review Area zones

Component	Expected capture rate	Basis for prediction
Initiation	65-85% regionally	7,640 historic locations*
Transport	80-95% regionally	Qualitative observations
Deposition	80-95%	4,000+ historic locations *

* Inventory data in Hofmeister (in preparation).

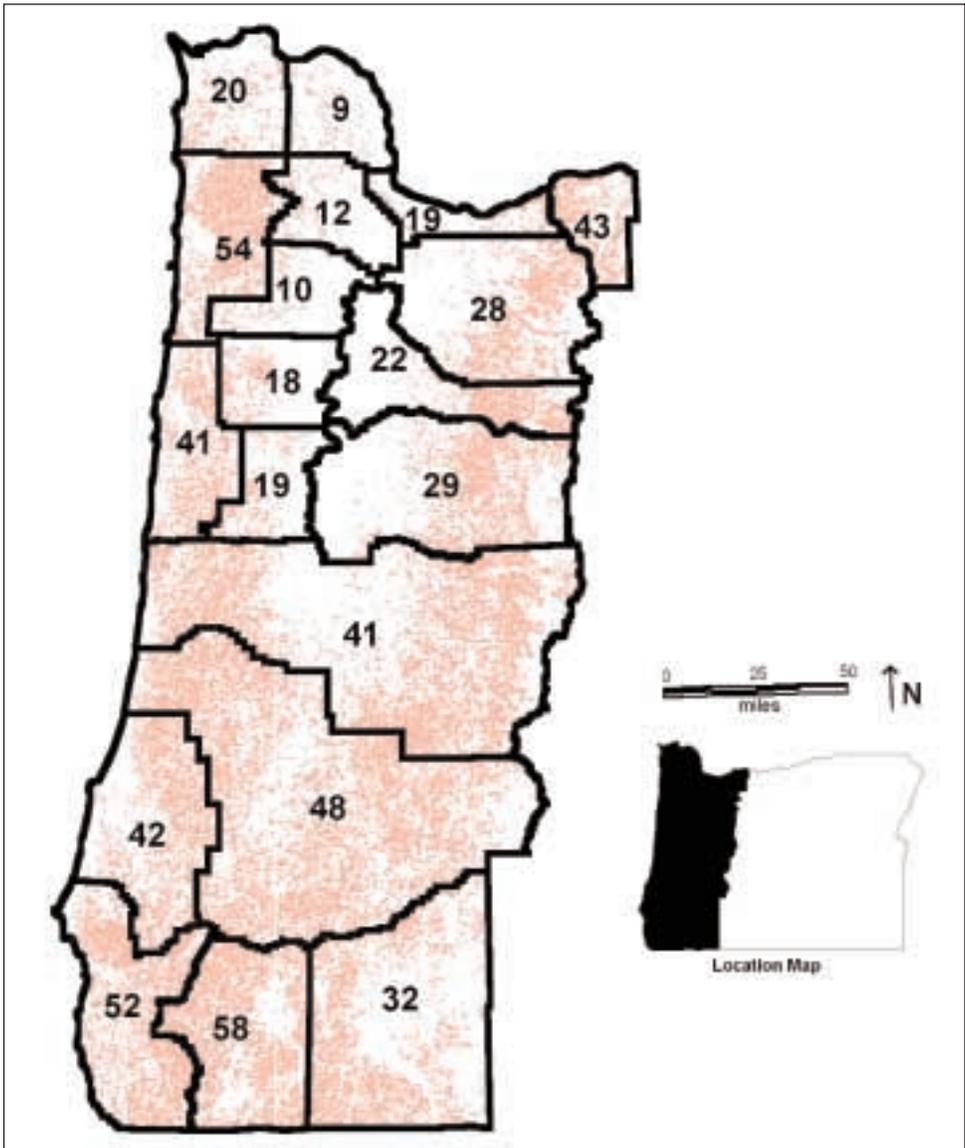

← Figure 25. The 19 western Oregon counties covered by the Further Review Area map. Further Review Areas are shown in red to provide a general indication of the relative distribution of hazard zones. The numbers are the percentage of that county's area mapped as a Further Review Area.

↓ Figure 26. Coalescing debris flow sources in Nagasaki, Japan. (From United Nations, 1996)

historic debris flow locations to the hazard output for deposition zones. The Further Review Area zone captured over 90 percent of the historic deposition locations. This is a particularly rough indicator because of the inherent variability in the deposition hazard, but it is reasonable to expect captures in the range of 80 percent to 95 percent.

Although each of these quantifications for initiation, transport, and deposition is based on limited data, the comparisons with inventory data are useful for estimating expected performance. As more data are collected, analyzed, and quantified from future events, these estimates can be evaluated further.



LIMITATIONS

The map outputs are intended to be used at a scale of 1:24,000, and the hazard information is stored at the original 10-m DEM spacing. This is a higher level of detail than is often used for regional mapping, but it is not a replacement for site-specific evaluation. Some of the reasons for this critical limitation are worth highlighting.

- *The map is based on coarsely-spaced representations of topography.* 10-m DEM data are the best regional topographic data available with full western Oregon coverage at this time. These DEM inputs do not incorporate changes since the development of the original topographic quadrangle data (in some cases over 20 years ago) and have inherent uncertainties (Holmes and others, 2000). The subsequent differences between the map and the DEM—from activities such as grading for development—could affect the hazard mapping in some areas. In addition, local features such as soil strength, hydrology, vegetative cover, geologic discontinuities, unfavorably dipping bedding planes of geologic units, seams of local weakness, and other local slope stability factors that are not incorporated in the map may be critical factors for particular areas. These conditions could not feasibly be assessed at the regional level yet may be critical for particular sites.
- *Only select areas have been field verified.* As explained in the section Characteristics of Debris Flows, local conditions can greatly affect debris flow hazards. Only a small sampling of areas in western Oregon could feasibly be field-evaluated for this project. Distinctive local conditions will inevitably affect accuracy of the results in some areas more than others.
- *The hazard itself is characteristically chaotic.* In some cases, debris flows can become tangled in confined channels and avulse (or jump) the confines of the channel and create a new path. Also, debris flow deposition paths will often divert substantially from one flow to the next. Barring the mapping of huge, overly conservative regional hazard zones, there will always be some level of uncertainty in identifying future impact areas.
- *The map is not currently correlated to recurrence intervals or intensities.* Recurrence intervals are important for the transition from hazard assessment to risk assessment and mitigation (Hungry, 1997) but can vary considerably, depending on local conditions (McCuen and others, 1990; Johnson and others, 2000) and method used (Orme, 1990). Due to a lack of time-sequenced regional data, we have not yet attempted to associate the hazard zones to recurrence intervals or intensities.
- *Unusually large slides may not be adequately captured.* This regional model focuses on medium-scale landslide hazard areas (10-m x 10-m map dimension). Very large slides are difficult to capture at this scale and, in some locations, this model may not identify the full extent of the hazard area. In particular, large volcanic landslides (lahars) and dam-break floods are not addressed in the Further Review Area map. For areas in the Oregon Cascades, lahar and historic glacial dam-break events are identified on existing USGS maps (Scott and others, 1997; Walder and others, 1999; Scott and others, 1999; O'Connor and others, 2001).

We sought to find reasonable agreement among the available sources of data and purposefully selected parameters to capture a high percentage of historic slide locations. It is inevitable, however, that slides will occur outside the Further Review Areas. While we

hope these slides will be small and not adversely impact people or property, it is nonetheless critical to note that *significant impacts outside the mapped zones are inevitable*.

The Further Review Areas have a relatively high hazard, and are considered more likely to be affected by rapidly moving landslides than other areas. The specific location and

timing of events, however, depends on a number of highly localized and variable parameters. The hazard map is a valuable screening tool for identifying high hazard areas. Used in conjunction with site-specific evaluations, the map can be helpful in regional planning and implementation of risk reduction measures.

RISK MANAGEMENT STRATEGIES

The map characterizes potential areas of hazard for rapidly moving landslides. Hazard is a term referring only to the geologic danger. Risk is a term used in the natural sciences to refer to the combination of geologic hazard plus the potential that the geologic hazard will impact something valuable. For example, a very high debris flow hazard area may have low risk if it is located in a remote, inaccessible wilderness area. On the other hand, if something of worth (an individual, a structure, road, fish-bearing stream, etc.) is exposed within that same hazard zone, there is a greater inherent risk of damage. Risk, thus, increases with both hazard and the value of objects or people in the potential impact path.

To develop an effective risk management strategy, it is critical to accurately identify both hazard and risk. This map provides general information about rapidly moving landslide hazards. Communities and individuals must assess their own risk by identifying valuables within the hazard areas. For example, a particular community may have two primary hazard areas identified as likely debris flow zones. One area could be a rarely visited park located within the hazard zone. The other area could consist of several blocks of residential and commercial buildings vital to the community's livelihood. In this simplified example, the community would likely

choose to prioritize reducing risk in the more developed area because of the higher inherent risk to property and lives.

Risk reduction includes a host of actions aimed at reducing the level of risk over both the short and long terms. The Further Review Area map allows for first-step screening of hazard zones and for characterizing the geographic extent of rapidly moving landslide hazards. While this regional tool does not replace site-specific analyses, it does facilitate systematic and consistent evaluations of the geography of the hazard. Follow-up studies can then focus resources on evaluating the specifics of local hazards and assess the associated local risks (Mears, 1977; Hungr and others, 1984; Hungr, 1997; Rickenmann, 1999).

Once risk is adequately characterized at a site-specific level, risk-management strategies can be evaluated. Part of reducing risk is simply avoiding activities that increase susceptibility, such as building roads in potential slide initiation areas, removing vegetation on high-hazard sites, and concentrating drainage into high-hazard areas. Other risk-reduction efforts can focus on reducing either the hazard itself or the exposure (keeping people and structures out of dangerous locations). In general, most risk management strategies can be grouped into (a) planning, policy, and education efforts, and (b) engineered mitigation.

Planning, Policy, and Education Efforts

Most debris flow mitigation is aimed at limiting exposure. Some Oregon-specific examples of planning, policy, and education efforts are provided in the sections below.

Debris flow damage to dwellings, business structures, roads and bridges can severely affect an entire community. Mitigation and risk-reduction efforts, therefore, are often most appropriate and effective when multiple parties join forces to ensure broad participation and ongoing commitment. Common debris flow mitigation approaches that can be implemented at both regional and community-specific scales may include information dissemination programs, public policies, warning systems, and temporary closures (of roads, parks, etc.).

Information Dissemination/Increasing Awareness

Senate Bill 12 is based on the recognition that the surest way to avoid threats to public safety from dangerous landslides is to limit time spent in locations with such a hazard, especially during periods of extreme rainfall. This can be achieved in some cases simply by increasing awareness of debris flow hazards. Many agencies and organizations provide useful public information to aid in the identification and mitigation of natural hazards, and a large body of literature has been developed. One helpful publication is the brochure titled “Landslides in Oregon: Protect Yourself and Your Property” developed by the State of Oregon.⁵ The reference list at the end of this paper provides some sources for locating additional information. Particularly valuable debris flow references are Blair and others (1985), Bowles (1985), United Nations (1996), Chen (1997), and Wieczorek and Naeser (2000).

⁵ This brochure is targeted to homeowners and citizens living or traveling in terrain that is debris flow prone. It was produced cooperatively by DOGAMI, ODF, the Oregon Department of Consumer and Business Services, and Oregon Emergency Management.

Public Policy Programs

Implementation of public policies, particularly through zoning and land use regulation, is a critical component for long-term risk reduction. The Further Review Area map is directly linked to local planning operations through SB 12. This valuable link is intended to ensure that individuals throughout western Oregon have access to the information provided on the map and can plan accordingly. It is hoped that this transfer of information will aid local mitigation efforts such as the establishment of evacuation routes, identification of safe havens prior to large storms, and possibly installment of physical warning devices (Figure 27) such as ground vibration sensors (LaHusen, 1996) and trip wires (Reid and others, 1999).

Another public policy program related to SB 12 is ODF forest practices regulation. Forest practices management efforts tend to focus on limiting the extent of vegetation removal and road construction in high-hazard areas. ODF has recently reevaluated the forest practices rules and will incorporate use of the Further Review Area map for screening potential downslope risks, including homes and highways that could potentially be impacted by rapidly moving landslides.

Debris Flow Warning Systems

Warnings and advisories are intended to identify the time frame when, and general area where, debris flows are most likely. As discussed in the section on trigger mechanisms, most (but not all) debris flows occur during, or closely after, high-rainfall storm events. The Oregon Debris Flow Warning System⁶ has been in place since 1997 and has been revised periodically. When a storm exceeding the thresholds discussed in the sec-

⁶ More information on the Oregon Debris Flow Warning System is available at <http://www.oregongeology.com/Landslide/debris-flow1.htm>.



Figure 27. Examples of monitoring devices for debris flow warnings, (a)—a current gage and (b) a wire sensor system. (Photos from United Nations, 1996)

Traffic Alerts and Temporary Closures

Roads can be particularly dangerous locations for debris flow impact; several damaging slide events in the 1996/97 storms involved motor vehicles. One of the many useful applications of the debris flow warning system is the temporary closure of areas where debris flows are likely or already occurring. As mandated by Senate Bill 12, the Oregon Department of Transportation (ODOT) has taken steps to provide warnings to motorists during periods of heavy rainfall. Warning signs are posted at known dangerous sections of Interstate Highway 84, and Oregon Highways 6 and 38. Upon notification that a debris flow warning has been issued, the appropriate ODOT dispatch center can activate flashing warning lights on the signs.

tion on trigger mechanisms is forecast, a debris flow advisory is issued. When the storm occurs or additional dangerous conditions exist, a debris flow warning may follow.

Predicting when debris flows will occur is an extremely difficult task. Weather patterns in Oregon are variable, and the conditions for timing and locating debris flows are more variable still. Despite the limitations, the debris flow warning system is a critical part of the State's effort to protect lives and property. Each new storm event adds to the information database and aids in refining criteria for debris flow forecasting.

Engineered Mitigation

Due to the large size, high-impact forces, and extreme variability encountered in debris flow hazards, active engineering solutions are often prohibitively costly, and nonengineering approaches are typically preferable. Nevertheless, engineered mitigation can be effective in some instances to reduce the potential for debris flow impact or increase the resistance of vulnerable areas. Common engineering measures to address debris flows can be grouped into (a) stabilization of potential source areas, (b) remedial measures in the transport zone, and (c) protection efforts de-

signed to decrease or maintain energy in the deposition zone (VanDine, 1985; Montgomery and others, 1991; United Nations, 1996). The following sections provide brief overviews of common engineering risk-reduction techniques.

Source Area Stabilization

Stabilization strategies employed within potential debris flow source areas include mechanical stabilization of hazardous soil and rock units, planting vegetation, removal of colluvial deposits, and use of retaining structures (Montgomery and others, 1991; Robertson, 1996). Mechanical stabilization of marginally stable rock and soil areas can include such things as rock bolts and dowels to stabilize potential failure blocks and boulders or the use of shotcrete cover. Debris fences (Figure 28) and other channel modifications discussed below can also be implemented in potential source areas to contain landslide materials before they grow into larger debris flows.



Figure 28. Debris fences installed below potential initiation sites in Pacifica, California. (From Montgomery and others, 1991)

Remedial Measures in the Transport Zone

Most active remedial measures focus on reducing the amount of source material that debris flows can carry downslope. Common measures near debris flow initiation sites include stabilizing valley side slopes (to reduce side slope failures, which add to the mass of the flows) and installation of debris fences (Figure 28), steel-lattice structures (Figure 29), ground sills (Figure 30), check dams, or other similar structures to reduce the energy and mobility of flows.

In select cases, the objective may be to increase flow capability to guide flows safely through or around vulnerable structures. For examples, at public-transportation crossings, debris flows can be routed under critical structures. Examples of mitigation measures include the construction of clear-span bridges (Figure 31), bridges with removable decks, and/or sacrificeable wooden structures. In conjunction with overpass structures, channel modifications are often designed to help route flows past vulnerable structures. Removing obstructions, reducing roughness of

the channel bed (e.g., by lining with concrete), and increasing channel gradients can all increase the transportability of the material in an effort to control the debris flow.

Protection Efforts in the Deposition Zone

Mitigation approaches implemented closer to the deposition end of a debris flow tend to mimic conditions that lead natural flows to settle as deposits. Such mea-



Figure 29. Steel-lattice dam constructed in Kirchbachgraben, Austria. (Photo from United Nations, 1996)

asures may include widening the flow path, decreasing the gradient, dewatering the flow material, and increasing the channel roughness. Structures used to achieve these modifications include the construction of debris basins and/or debris flow barriers. Debris basins can take a number of forms, but tend to be designed as structures that mimic the shape of typical debris flow deposits and are lined with rough materials that act to inhibit transport and induce deposition. Debris barriers are often located at downstream locations where debris flows may have bulked up considerably, and therefore such barriers can be quite large and expensive structures (Figures 32 and 33). In order to block or divert flows, deflection structures such as berms, walls, and groupings of posts and trees have also been used (Hollingsworth and Kovacs, 1981; Van Dine, 1985). An example of a deflection wall is shown in Figure 34, and a schematic for an A-shaped deflection wall to protect a particular structure is shown in Figure 35.



Figure 30. Ground sills constructed in Nagano, Japan. (Photo from United Nations, 1996)

Figure 31. Clear-span bridge constructed in Canton of Bern, Switzerland, along with guidewalls and a concrete-lined channel. (Photo from United Nations, 1996)

This is just a small sample of engineered mitigation options. Although these physical measures may be useful and necessary in some situations, there are significant limitations and drawbacks to engineered structures for debris flows. Limitations (or deterrents) include short- and long-term environmental effects, the requirement for ongoing maintenance, difficulties in developing appropriate design parameters, and the possibility that structures may just relocate the hazard and shift the impact to adjacent properties (Davies, 1997). Much more information is provided in Campbell (1975), Mears (1977), Hollingsworth and Kovacs (1981), Miles and Kellerhals (1981), VanDine (1985), Zhang and others (1985), Montgomery and others (1991), Robertson (1996), United Nations (1996), Davies (1997), and VanDine and others (1997).



Figure 32. Steel-cell barrage structure set up on the Issyk River, Kazakhstan. (Photo from United Nations, 1996)

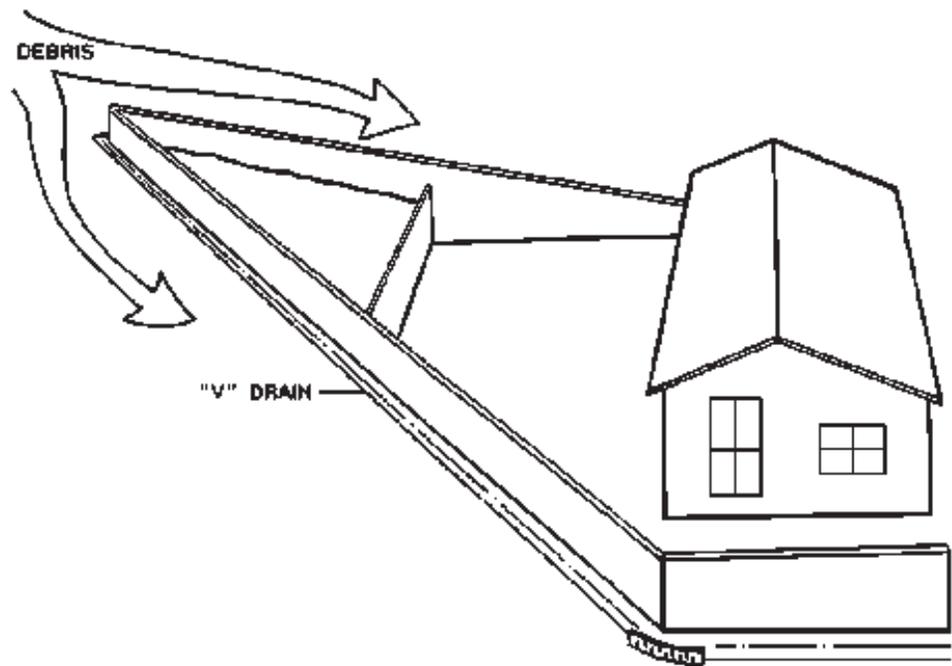




Figure 33. Check dam in Hyogo, Japan (30 m high, 78 m long, storage capacity 300,000 m³), (a) before and (b) after a debris flow. (Photo from United Nations, 1996)



↑ Figure 34. Protection wall constructed on the Bolshaya Almatinka River, Kazakhstan. (Photo from United Nations, 1996)



➔ Figure 35. Schematic of an A-shaped deflection wall serving as a splitting wedge to deflect debris. (Photo from United Nations, 1996)

MAP UPDATES AND FUTURE WORK

Debris flow research and practice is a dynamic field and continues to advance. Although map updates for the present study have not been scheduled or budgeted at this time, specific areas where future work may be particularly beneficial include the following:

- *Tracking locations of, and results from, Further Review Area site studies.* More detailed site-specific studies will provide additional information that will be useful in future hazard assessments. The results of these follow-up studies should be consolidated and preserved.
- *More detailed mapping at local levels.* The Further Review Area map is necessarily general. Refinements at local levels (e.g., county or city) may be justified in the future, particularly in the regions of highest risk.
- *Additional inventory data collection and consolidation.* Landslide inventories were used extensively in the development of the map and are critical for both short and long-term applications. The value of collected inventory data could be greatly enhanced by adoption of consistent record-keeping procedures and programmatic consolidation of time-sensitive data gathered after major storm events (e.g., Hofmeister, 2000).
- *Expanded inventory data comparisons.* As more data are collected and consolidated, it will be possible to perform valuable, additional testing of the model. This will allow for refinement of parameter selections and further evaluation of regional modifiers to increase capture rates.
- *Incorporation of regional hazard variation by physiographic region.* As part of this project, we looked at modifying input parameters by regional geologic unit in order to narrow the hazard zones in particular terrain conditions (Hofmeister and Miller, in preparation). The geologic data were not conclusive regarding regional incorporation of terrain modifiers, even though we know that significant regional variations exist across the state. With improvements in regional map input, as well as additional inventory data collection, we should be able to improve the map accuracy.
- *Gathering data to evaluate risk assessment and design characteristics.* With further calibration based on local field investigations, the modeling output developed in this project may be correlated with such important factors as debris flow recurrence intervals, design volumes, and storm intensities.
- *Application to eastern Oregon.* The mapping approach is applicable to other regions and would benefit from additional testing and refinements in other terrains. Currently, coverage is comprehensive for western Oregon, but no comparable map has been developed for eastern Oregon.
- *Use of more detailed and/or accurate topographic data when available.* The modeling approach is highly dependent on the quality and resolution of the input elevation data. Several efforts are currently underway to improve these data (for a wide range of applications). The future availability of more detailed terrain data could substantially improve the ability to refine debris flow hazard zones.
- *Addressing other types of landslide hazards on a regional basis.* As mentioned in the introductory sections, this project focused on only one type of rapidly moving landslide hazard. Other landslide types such as rockfalls and large deep-seated landslides also cause significant damage and economic loss in Oregon. Further mapping of these other landslide hazards – through aerial photography, GIS modeling, field study, and other investigative techniques – would better define their geographic extent, and allow for more consistent and comprehensive treatment of their hazards.

ACKNOWLEDGMENTS

Funding for this mapping effort was provided by the State of Oregon. This study was undertaken to fulfill the requirements set forth in Senate Bill 12 which was enacted in 1999 and incorporated recommendations provided by the 1997 State Landslide Task Force. Content reviews of the report were provided by Scott Burns, Fred Swanson, JL Clark, Tricia Sears, Yumei Wang, John Beaulieu, Dennis Olmstead, and Susan Cannon.

Gerald Black of DOGAMI (retired) provided valuable assistance with the regional field investigations and project planning. John Beaulieu, Dennis Olmstead, and Yumei Wang of DOGAMI, and John Seward and David Michael of ODF gave critical support in the day-to-day development of this project. Field reconnaissance assistance from Fred Swanson of the USDA Forest Service Pacific Northwest Research Station, and John Seward and David Michael of ODF was essential in refining the mapping methods and results. We also extend our thanks to all the individuals who helped with the final stage of field evaluations and are listed in Appendix C.

We gratefully acknowledge the forthright and generous sharing of information from debris flow researchers and practicing investigators Richard Iverson, Steven Schilling, Susan Cannon, Gerald Wiczorek, Steven Ellen, and Mark Reid, USGS; Lee Benda, Earth Systems Institute; Rich Giraud Utah Geological Survey; Scott Burns and Julie Griswold, Portland State University; Steven Tay-

lor, Western Oregon State College; Bill Dietrich, University of California-Berkeley; Jonathan Fannin and Oldrich Hungr, University of British Columbia; and David Montgomery, University of Washington. Most welcome and timely insight and data for the GIS modeling were provided by Kelly Christianson, USDA Forest Service; Mark Miller, GeoEngineers, Inc.; and Ralph Haugerud, USGS.

We thank Keith Cubic and Les Wilson of Douglas County Planning, and Tricia Sears of the City of Portland Land Use Planning Division (previously with Multnomah County Land Use Planning) for providing helpful planning and policy input as the project progressed. Emmor Nile at ODF provided help to produce GIS files. At DOGAMI, Kate Halstead, Alva Schneff, and Neva Beck gave substantial help with the development and layout of this report; cartographic review was provided by Paul Staub, Clark Niewendorp, and Mark Neuhaus; and editorial review was provided by Klaus Neuendorf.

Portions of the software used for identification of landslide source areas and debris-flow routing were developed in collaboration with the Coastal Landscape Analysis and Modeling Study (CLAMS), which is sponsored cooperatively by the Oregon State University College of Forestry, the USDA Forest Service Pacific Northwest Research Station, and the Oregon Department of Forestry.

REFERENCES CITED

- Beaulieu, J.D., and Olmstead, D.L., 1999, Mitigating geologic hazards in Oregon: A technical reference manual: Oregon Department of Geology and Mineral Industries Special Paper 31, 60 p.
- Benda, L.E., 1988, Debris flows in the Tyee sandstones of the Oregon Coast Range: Seattle, Wash., University of Washington master's thesis, 134 p.
- Benda, L.E., and Cundy, T.W., 1990, Predicting deposition of debris flows in mountain channels: *Canadian Geotechnical Journal*, v. 27, no. 4, p. 409-417.
- Benda, L.E., and Dunne, T., 1997, Stochastic forcing of sediment supply to channel networks from landsliding and debris flow: *Water Resources Research*, v. 33, no. 12, p. 2849-2863.
- Benda, L.E., Veldhuisen, C., Miller, D.J., and Rodgers-Miller, L., 2000, Slope instability and forest land managers: A primer and field guide: Seattle, Wash., Earth Systems Institute, 74 p.
- Blair, M.L., Vlastic, T.C., Cotton, W.R., and Fowler, W., 1985, When the ground fails: Planning and engineering response to debris flows: Boulder, Colo., University of Colorado Institute of Behavioral Science, Program on Environment and Behavior Monograph 40, 117 p.
- Bowles, D.S., ed., 1985, Delineation of landslide, flash flood, and debris flow hazards in Utah. Proceedings of a Specialty Conference held at Utah State University, Logan, Utah, June 14-15, 1984: Logan, Utah, Utah State University, Utah Water Research Laboratory General Series UWRL/G-85/03, 592 p.
- Burroughs, E.R., Jr., 1984, Landslide hazard rating for portions of the Oregon Coast Range: Unpublished paper presented at Symposium on Effects of Forest Land Use on Erosion and Slope Stability, Honolulu, Hawaii, May 7-11, 1984, [10 p.].
- Burroughs, E.R., and Thomas, B.R., 1977, Declining root strength in Douglas fir after felling as a factor in slope stability: USDA Forest Service Research Paper INT-190, 27 p.
- Campbell, R.H., 1975, Soil slips, debris flows, and rainstorms in the Santa Monica Mountains and vicinity, southern California: U.S. Geological Survey Professional Paper 851, 51 p.
- Campbell, R.H., and Chirico, P., 1999, Geographic information system (GIS) procedure for preliminary delineation of debris-flow hazard areas from a digital terrain model, Madison County, Virginia: U.S. Geological Survey Open-File Report 99-336, 25 p.
- Cannon, S.H., 1988, Regional rainfall-threshold conditions for abundant debris-flow activity, chap. 4 of Ellen, S.D., and Wiczorek, G.F., eds., Landslides, floods, and marine effects of the storm of January 3-5, 1982, in the San Francisco Bay region, California: U.S. Geological Survey Professional Paper 1434, p. 35-42.
- — — 1989, An evaluation of the travel-distance potential of debris flows: Utah Geological and Mineral Survey Miscellaneous Publication 89-2, 35 p.
- — — 1997, Evaluation of the potential for debris and hyperconcentrated flows in Capulin Canyon as a result of the 1996 Dome Fire, Bandelier National Monument, New Mexico: U.S. Geological Survey Open-File Report 97-136, 20 p.
- Cannon, S.H., and Savage, W.Z., 1988, A mass-change model for the estimation of debris-flow runoff: *Journal of Geology*, v. 96, p. 221-227.
- Carrara, A., Cardinali, M., Guzzetti, F., and Reichenbach, P., 1997, GIS-based techniques for mapping landslide hazard: [Bologna, Italy] Online document <http://deis158.deis.unibo.it/gis>, accessed 2002 [43 p.].
- Chen, C.-L., ed., Debris-flow hazard mitigation: Mechanics, prediction, and assessment. Proceedings of First International Conference, San Francisco, Calif., August 7-9, 1997: New York, N.Y., American Society of Civil Engineers, 817 p.
- Corominas, J., 1996, The angle of reach as a mobility index for small and large landslides: *Canadian Geotechnical Journal*, v. 33, p. 260-271.
- Costa, J.E., 1988, Floods from dam failures, chap. 26 of Baker, V.R., Kochel, R.C., and Patton, P.C., eds., Flood geomorphology: New York, John Wiley and Sons, p. 439-463.
- Crozier, M.J., and Eyles, R.J., 1980, Assessing the probability of rapid mass movement: New Zealand Institution of Engineers, Proceedings of Technical Groups, v. 6, no. 1(G)(pt. 2), Third Australia-New Zealand Conference on Geomechanics, Wellington, v. 2, p. 2-47-2-51.
- Davies, T.R.H., 1997, Using hydroscience and hydrotechnical engineering to reduce debris-flow hazards [invited overview paper], in Chen, C.-L., ed., Debris-flow hazards mitigation: Mechanics, prediction, and assessment. Proceedings of First International Conference, San Francisco, Calif., August 7-9, 1997: New York, N.Y., American Society of Civil Engineers, p. 787-810.
- Dietrich, W.E., and Dunne, T., 1978, Sediment budget for a small catchment in mountainous terrain: *Zeitschrift für Geomorphologie*, Suppl. Bd. 29, p. 191-206.
- Ellen, S.D., and Fleming, R.W., 1987, Mobilization of debris flows from soil slips, San Francisco Bay Region, California, in Costa, J.E., and Wiczorek, G.F., eds., Debris flows/avalanches. Process, recognition, and mitigation: Geological Society of America Reviews in Engineering Geology VII, p. 31-40.

- Ellen, S.D., Mark, R.K., Cannon, S.H., and Knifong, D.K., 1993, Map of debris-flow hazard in the Honolulu District of Oahu, Hawaii: U.S. Geological Survey Open-File Report 93-213, 25 p., 1 map.
- Fannin, R.J., and Rollerson, T.P., 1993, Debris flows: Some physical characteristics and behaviour: Canadian Geotechnical Journal, v. 30, no. 1, p. 71-81.
- Fannin, R.J., Wise, M.P., Wilkinson, J.M.T., Thomson, B., and Hetherington, E.D., 1997, Debris flow hazard assessment in British Columbia, in Chen, C.-L., ed., Debris-flow hazards mitigation: Mechanics, prediction, and assessment. Proceedings of First International Conference, San Francisco, Calif., August 7-9, 1997: New York, N.Y., American Society of Civil Engineers, p. 197-206.
- Federal Emergency Management Agency (FEMA), 1989, Landslide loss reduction: A guide for state and local government planning: Federal Emergency Management Agency (FEMA) Earthquake Hazards Reduction Series 52 (FEMA 182), 50 p.
- Gregory, K.J., Gurnell, A.M., and Hill, C.T., 1985, The permanence of debris dams related to river channel processes: Hydrological Sciences Journal, v. 30, no. 3, p. 371-381.
- Griswold, J., and Iverson, R.M., 2002, Inundation-area statistics and mobility equations for debris flows and rock avalanches [abs.]: Geological Society of America Abstracts with Programs, v. 34, no. 5, p. A-35.
- Hammond, C., Hall, D.E., Miller, S., and Swetik, P., 1992, Level I Stability Analysis (LISA) documentation for version 2.0: USDA Forest Service, Intermountain Research Station, General Technical Report INT-285, 190 p.
- Hirano, M., Harada, T., Banihabib, M.E., and Kawahara, K., 1997, Estimation of hazard area due to debris flow, in Chen, C.-L., ed., Debris-flow hazards mitigation: Mechanics, prediction, and assessment. Proceedings of First International Conference, San Francisco, Calif., August 7-9, 1997: New York, N.Y., American Society of Civil Engineers, p. 697-706.
- Hofmeister, R.J., 2000, Slope failures in Oregon. GIS inventory for three 1996/97 storm events: Oregon Department of Geology and Mineral Industries Special Paper 34, 20 p., 1 compact disc.
- Hofmeister, R.J., (in preparation), Digital compilation of Oregon debris flow locations.
- Hofmeister and Miller, (in preparation), Comparing debris flow initiation parameters for Oregon Senate Bill 12 mapping.
- Hollingsworth, R., and Kovacs, G.S., 1981, Soil slumps and debris flows: Prediction and Protection: Association of Engineering Geologists Bulletin, v. 18, no. 1, p. 17-28.
- Holmes, K.W., Chadwick, O.A., and Kyriakidis, P.C., 2000, Error in a USGS 30-meter digital elevation model and its impact on terrain modeling: Journal of Hydrology, v. 233, p. 154-173.
- Hungr, O., 1997, Some methods of landslide hazard intensity mapping, in Cruden, D.M., and Fell, R., eds., Landslide risk assessment: Proceedings of the International Workshop on Landslide Risk Assessment, Honolulu, Hawaii, USA, February 19-21, 1997, p. 215-226.
- Hungr, O., 1999, Landslide/debris flow runout prediction for risk assessment: Forest Renewal BC Research Award, Final Report, 44 p., 1 App., 4 tables, 2 figures.
- Hungr, O., Morgan, G.C., and Kellerhals, R., 1984, Quantitative analysis of debris torrent hazards for the design of remedial measure: Canadian Geotechnical Journal, v. 21, p. 663-677.
- Iverson, R.M., 1997, The physics of debris flows: Reviews of Geophysics, v. 35, p. 245-296.
- Iverson, R.M., 2000, Landslide triggering by rain infiltration: Water Resources Research, v. 36, no. 7, p. 1897-1910.
- Iverson, R.M., and LaHusen, R.G., 1989, Dynamic pore-pressure fluctuations in rapidly shearing granular materials: Science, v. 246, p. 796-799.
- Iverson, R.M., Reid, M.E., and LaHusen, R.G., 1997, Debris-flow mobilization from landslides: Annual Review of Earth and Planetary Sciences, v. 25, p. 85-138.
- Iverson, R.M., Schilling, S.P., and Vallance, J.W., 1998, Objective delineation of lahar-inundation zones: Geological Society of America Bulletin, v. 110, no. 8, p. 972-984.
- Jochim, C.L., Rogers, W.P., Truby, J.O., Wold, R.L., Jr., Weber, G., and Brown, S.P., 1988, Colorado landslide hazard mitigation plan: Colorado Geological Survey Bulletin 48, 149 p.
- Johnson, A.M. (with contributions by Rodine, J.D.), 1984, Debris flow, in Brunsden, D., and Prior, D.B., eds., Slope instability: New York, Wiley and Sons, p. 257-361.
- Johnson, S.L., Swanson, F.J., Grant, G.E., and Wondzell, S.M., 2000, Riparian forest disturbances by a mountain flood—the influence of floated wood: Hydrological Processes, v. 14, p. 3031-3050.
- Keefer, D.K., Wilson, R.C., Mark, R.K., Brabb, E.E., Brown, W.M., III, Ellen, S.D., Harp, E.L., Wieczorek, G.F., Alger, C.S., and Zatzkin, R.S., 1987, Real-time landslide warning during rainfall: Science, v. 238, p. 921-925 (13 November 1987).
- LaHusen, 1996, Detecting debris flows using ground vibrations: U. S. Geological Survey Fact Sheet 236-96, 3 p.
- Major, J.J., 1997, Depositional processes in large-scale debris-flow experiments: Journal of Geology, v. 105, no. 3, p. 345-366.

- May, C.L., 1998, Debris flow characteristics associated with forest practices in the Central Oregon Coast Range: Corvallis, Ore., Oregon State University master's thesis, 121 p.
- McCuen, R.H., Ayyub, B.M., and Hromadka, T.V., 1990, Risk of debris-basin failure: *Journal of Water Resources Planning and Management*, v. 116, no. 4, p. 473-857.
- Mears, A.I., 1977, Debris-flow hazard analysis and mitigation. An example from Glenwood Springs, Colorado: Colorado Geological Survey Information Series 8, 45 p.
- Miles, M.J., and Kellerhals, R., 1981, Some engineering aspects of debris torrents: Canadian Society of Civil Engineers, Proceedings of the 5th Canadian Hydrotechnical Conference, Fredericton NB, p. 395-420.
- Millard, T., 1999, Debris-flow initiation in coastal British Columbia gullies: British Columbia Forest Service, Forest Research Technical Report TR-002, 22 p.
- Miller, D. J., 2002, Programs for DEM analysis: Seattle, Wash., Earth Systems Institute, 33 p.
- Mohrig, D., Whipple, K.X., Hondzo, M., Ellis, C., and Parker, G., 1998, Hydroplaning of subaqueous debris flows: *Geological Society of America Bulletin*, v. 110, no. 3, p. 387-394.
- Montgomery, D.R., and Dietrich, W.E., 1994, A physically based model for the topographic control on shallow landsliding: *Water Resources Research*, v. 30, p. 1153-1171.
- Montgomery, D.R., Schmidt, K.M., Greenberg, H.M., and Dietrich, W.E., 2000, Forest clearing and regional landsliding: *Geology*, v. 28, no. 4, p. 311-314.
- Montgomery, D.R., Wright, R.H., and Booth, T., 1991, Debris flow hazard mitigation for colluvium-filled swales: *Association of Engineering Geologists Bulletin*, v. 28, no. 3, p. 303-323.
- Morgan, B.A., Wieczorek, G.F., Campbell, R.H., and Gori, P.L., 1997, Debris-flow hazards in areas affected by the June 27, 1995, storm in Madison County, Virginia: U.S. Geological Survey Open-File Report 97-438, 14 p.
- Nakagawa, H., and Takahashi, T., 1997, Estimation of a debris flow hydrograph and hazard area, in Chen, C.-L., ed., Debris-flow hazards mitigation: Mechanics, prediction, and assessment. Proceedings of First International Conference, San Francisco, Calif., August 7-9, 1997: New York, N.Y., American Society of Civil Engineers, p. 64-73.
- O'Connor, J. E., Hardison, J. H. III, Costa, J. E., 2001, Debris flows from failures of Neoglacial-age moraine dams in the Three Sisters and Mount Jefferson Wilderness Areas, Oregon: U. S. Geological Survey Professional Paper 1606, 93 p., 2 plates.
- Orme, A.R., 1990, Recurrence of debris production under coniferous forest, Cascade foothills, north-west United States, chap. 6 of Thornes, J.B., ed., *Vegetation and erosion*: New York, Wiley and Sons, p. 67-84.
- Pack, R.T., Tarboton, D.G., and Goodwin, C.N., 1998, Terrain stability mapping with SINMAP. Technical description and users guide for version 1.00: Salmon Arm, B.C., Canada, Terratech Consulting Ltd., Report Number 4114-0, 75 p.
- Pierson, L.A., and Van Vickle, R., 1993, Rockfall hazard rating system. Participant's Manual: Federal Highway Administration Publication FHWA-SA-93-057, 102 p.
- Pierson, T.C., 1980, Piezometric response to rainstorms in forested hillslope drainage depressions: [New Zealand] *Journal of Hydrology*, v. 19(1), 10 p.
- Pyles, M.R., Adams, P.W., Beschta, R.L., and Skaugset, A.E., 1998, Forest practices and landslides: Unpublished report prepared for Oregon Governor John A. Kitzhaber, January 1998, 49 p.
- Reid, M.E., LaHusen, R.G., and Ellis, W.L., 1999, Real-time monitoring of active landslides: U.S. Geological Survey Fact Sheet 091-99, 2 p.
- Reneau, S.L., and Dietrich, W.E., 1987, The importance of hollows in debris flow studies. Examples from Marin County, California, in Costa, J.E., and Wieczorek, G.F., eds., *Debris flows/avalanches. Process, recognition, and mitigation*: Geological Society of America Reviews in Engineering Geology VII, 26 p.
- Rickenmann, D., 1999, Empirical relationships for debris flows: *Natural Hazards*, v. 19, no. 1, p. 47-77.
- Ritter, D.F., Kochel, R.C., and Miller, J.R., 1995, *Process geomorphology*: Dubuque, Iowa, Wm. C. Brown Publishers, 546 p.
- Robertson, C.A., 1996, Summary of debris flow hazard mitigation alternatives and approaches, Dodson, Oregon: Unpublished report (Shannon and Wilson, Inc.) to Union Pacific Railroad, May 24, 1996, 28 p., 1 app., 1 table, 11 figures.
- Robison, E.G., Mills, K., Paul, J., Dent, L., Skaugset, A., 1999, Storm impacts and landslides of 1996. Final Report: Oregon Department of Forestry Forest Practices Technical Report 4, 145 p.
- Rollerson, T.P., Thomson, B., and Millard, T.H., 1997, Identification of Coastal British Columbia terrain susceptible to debris flows, in Chen, C.-L., ed., *Debris-flow hazards mitigation: Mechanics, prediction, and assessment*. Proceedings of First International Conference, San Francisco, Calif., August 7-9, 1997: New York, N.Y., American Society of Civil Engineers, p. 484-495.
- Scott, W. E., Iverson, R. M., and Fisher, B. J., 1999, Volcano hazards in the Three Sisters Region, Oregon: U. S. Geological Survey Open-File Report 99-437, 14 p., 1 plate.

- Scott, W. E., Pierson, T. C., Schilling, S. P., Costa, J. E., Gardner, C. A., Vallance, J. W., and Major, J. J., 1997, Volcano hazards in the Mount Hood Region, Oregon: U. S. Geological Survey Open-File Report 97-89, 14 p., 1 map.
- Sidle, R.C., Pearce, A.J., and O'Loughlin, C.L., 1985, Hillslope stability and land use: American Geophysical Union Water Resources Monograph 11, 140 p.
- Swanson, F.J., and Dyrness, C.T., 1975, Impact of clear-cutting and road construction on soil erosion by landslides in the western Cascade Range, Oregon: *Geology*, v. 3, no. 7, p. 393-396.
- Swanson, F.J., and Lienkaemper, G.W., 1978, Physical consequences of large organic debris in Pacific Northwest streams: USDA Forest Service Technical Report PNW-69, 12 p.
- Swanson, F.J., and Lienkaemper, G.W., 1985, Geologic zoning of slope movements in western Oregon, U.S.A.: International Conference and Field Workshop on Landslides, 4th, Tokyo, 1985, Proceedings, p. 41-45.
- Tsukamoto, Y., Ohta, T., and Noguchi, H., 1982, Hydrological and geomorphological studies of debris slides on forested hillslopes in Japan, in Recent developments in the explanation of prediction of erosion and sediment yield, Proceedings of the Exeter Symposium, July 1982, p. 89-98.
- Turner, A.K., and Schuster, R.L., eds., 1996, Landslides: Investigation and mitigation: Transportation Research Board, National Research Council, Special Report 247, 673 p.
- United Nations, 1996, Mudflows. Experience and lessons learned from the management of major disasters: New York, NY, United Nations Department of Humanitarian Affairs, Document No. DHA/96/100, 139 p.
- VanDine, D.F., 1985, Debris flows and debris torrents in the southern Canadian Cordillera: *Canadian Geotechnical Journal*, v. 22, p. 44-68.
- VanDine, D.F., Hungr, O., Lister, D.R., and Chatwin, S.C., 1997, Channelized debris flow mitigative structures in British Columbia, Canada, in Chen, C.-L., ed., Debris-flow hazards mitigation: Mechanics, prediction, and assessment. Proceedings of First International Conference, San Francisco, Calif., August 7-9, 1997: New York, N.Y., American Society of Civil Engineers, p. 606-615.
- Vaugeois, L.M., and Shaw, S.C., 2000, Modeling shallow landslide potential for watershed management, in Proceedings from the 2000 ESRI International User Conference, June 26-30, 2000 (online edition), <http://www.esri.com/library/userconf/proc00/professional/papers/PAP310/p310.htm>, accessed 10/6/00, 26 p.
- Walder, J. S., Gardner, C. A., Conrey, R. M., Fisher, B. J., and Schilling, S. P., 1999, Volcano hazards in the Mount Jefferson Region, Oregon: U. S. Geological Survey Open-File Report 99-24, 14 p., 2 plates.
- Wang, Y., Summers, R., and Hofmeister, R.J., in preparation, Estimating landslide damage and loss values in Oregon
- Ward, T.J., Li, R.M., and Simons, D.B., 1978, Landslide potential and probability considering randomness of controlling factors: International Symposium on Risk and Reliability in Water Resources, University of Waterloo, Waterloo, Canada, June 26-28, Proceedings, p. 592-608.
- Wells, W.G., 1987, The effects of fire on the generation of debris flows in southern California, in Costa, J.E., and Wieczorek, G.F., eds., Debris flows/avalanches. Process, recognition, and mitigation: Geological Society of America Reviews in Engineering Geology VII, p. 105-114.
- Wieczorek, G.F., 1996, Landslide-triggering mechanisms, chap. 4 of Turner, A.K., and Schuster, R.L., eds., 1996, Landslides: Investigation and mitigation: Transportation Research Board, National Research Council, Special Report 247, p. 76-90.
- Wieczorek, G.F., Harp, E.L., Mark, R.K., and Bhattacharyya, A.K., 1988, Debris flows and other landslides in San Mateo, Santa Cruz, Contra Costa, Alameda, Napa, Solano, Sonoma, Lake, and Yolo Counties and factors influencing debris-flow distribution, chap. 8 of Ellen, S.D. and Wieczorek, G.F., eds., Landslides, floods, and marine effects of the storm of January 3-5, 1982, in the San Francisco Bay region, California: U.S. Geological Survey Professional Paper 1434, p. 133-161.
- Wieczorek, G.F., and Naeser, N.D., eds., 2000, Debris-flow hazards mitigation: Mechanics, prediction, and assessment: Second International Conference on Debris-Flow Hazards Mitigation, Taipei, Taiwan, August 16-18, 2000, Proceedings: Rotterdam, Netherlands, A.A. Balkema Publishing, 608 p.
- Wieczorek, G.F., and Sarmiento, J., 1988, Rainfall, piezometric levels and debris flows near La Honda, California, in storms between 1975 and 1983, chap. 8 of Ellen, S.D. and Wieczorek, G.F., eds., Landslides, floods, and marine effects of the storm of January 3-5, 1982, in the San Francisco Bay region, California: U.S. Geological Survey Professional Paper 1434, p. 43-62.
- Wiley, T.J., 2000, Relationship between rainfall and debris flows in western Oregon: *Oregon Geology*, v. 62, no. 2, p. 27-43.
- Wilkinson, J.M.T., and Fannin, R.J., 1997, A probabilistic technique for terrain stability assessment of open slopes in British Columbia: 11th Vancouver Geotechnical Society Symposium – Forestry Geotechnique and Resource Engineering, Vancouver, B.C., May 30, 1997, Proceedings, p. 17-30.

- Wilson, R.C., 1997, Normalizing rainfall/debris-flow thresholds along the U.S. Pacific Coast for long-term variations in precipitation climate, in Chen, C.-L., ed., Debris-flow hazards mitigation: Mechanics, prediction, and assessment. Proceedings of First International Conference, San Francisco, Calif., August 7-9, 1997: New York, N.Y., American Society of Civil Engineers, p. 32-43.
- Wilson, R.C., and Wieczorek, G.F., 1995, Rainfall thresholds for the initiation of debris flows at La Honda, California: *Environmental and Engineering Geoscience*, v.1, no. 1, p. 11-27.
- Wu, T.H., and Abdel-Latif, M.A., 2000, Prediction and mapping of landslide hazard: *Canadian Geotechnical Journal*, v. 37, p. 781-795.
- Zhang, X., Liu, T., Wang, Y., and Luo, J., 1985, The main features of debris flows and control structures in Hunshui Gully, Yuannan Province, China: International Symposium on Erosion, Debris Flow and Disaster Prevention, Sept. 3-5, 1985, Tsukuba, Japan, Proceedings, p. 181-186.
- Ziemer, R.R., 1981, Roots and the stability of forested slopes, in Erosion and sediment transport in Pacific Rim steeplands: Christchurch, New Zealand, International Association of Hydrological Sciences, IAHS/AISH Publication 132, p. 343-357.

APPENDIX A GLOSSARY OF TERMS

Aerial photo interpretation—Includes the use of aerial photographs to observe features such as drainage patterns, vegetation and topographic anomalies, and other geomorphic features to highlight areas of historic and/or potential slope instability.

Capture—Term used specifically herein to refer to the percentage of landslides identified by a particular hazard model selection. Used to evaluate various modeling approaches and used in conjunction with evaluations of the total percentage of map area identified as a potential hazard. Higher capture values indicate that more landslides are identified for a given amount of mapped hazard area, which is considered preferable.

Colluvial materials (or, colluvium)—A general term used to describe poorly sorted and typically loosely consolidated soil and rock that is deposited over time by rainwash, landslide processes, and/or downslope creep.

Confined channels—Channels that are characteristically confined by steep valley walls, constricting potential lateral deposition of debris flows. These channels, particularly when steep, can be quite dangerous in the event of debris flows as material can be funneled through the confined system.

Debris fans—Can develop through debris flow deposition processes. Typically found at the base of steep hillslopes and at the mouths of steep canyons, they can be particularly dangerous locations with repetitive debris flow impacts.

Debris flows—Debris flows are rapidly moving landslides that are characterized by water-charged soil, rock, colluvium, and organic material that travels down steep topography until momentum is eventually lost and

the scoured debris is deposited. They are often triggered by small landslides that mobilize and grow to be large flows that can travel great distances (miles in some cases).

Digital Elevation Model (DEM)—A digital representation of topography consisting of a regularly spaced grid of elevation values.

Further Review Area—As defined by Senate Bill 12, “an area of land within which further site-specific review should occur before land management or building activities begin because either the State Department of Geology and Mineral Industries or the State Forestry Department determines that the area reasonably could be expected to include sites that experience rapidly moving landslides as a result of excessive rainfall.” The map which this report accompanies defines the Further Review Area boundaries developed by the Departments of Geology and Forestry.

Lahars—Similar to debris flows, but derived from volcanic debris. Lahars can travel extreme distances down the flanks of volcanoes and into flatter, low-lying areas (e.g., historic lahars originating on Mount Hood traveled all the way down the Sandy River to the confluence with the Columbia River). The U.S. Geological Survey (USGS) has mapped lahar and other volcanic hazards for some of the volcanoes in the Cascade Range (www.usgs.gov).

Landslide—A general term referring to the movement of soil, rock, and/or organic materials downslope. Landslides can range from very small to very large and rates of movement can be slow to very rapid. Figure 3 provides a schematic outline of various types of landslides. Debris flows are a specific type of landslide.

Landslide inventory – A database of historic landslide events. Landslide inventories can be particularly useful to test the performance and applicability of various hazard modeling approaches.

Rapidly moving landslides – A term used in Senate Bill 12 to refer to landslides that transport material rapidly downslope. Debris flows are a common type of rapidly moving landslide.

Topographic quadrangle – A standardized map produced by the U.S. Geological Survey (USGS). USGS 7 1/2-minute quadrangles are

defined by 7 1/2 minutes each of latitude and longitude (60 minutes=one degree) – an approximately rectangular area that, in Oregon, measures about 6 mi (10 km) east-west by 9 mi (14 km) north-south.

Trigger mechanisms – Processes and conditions that can trigger slope failures. Includes intense rainfall, earthquake shaking, volcanic eruption, and rapid snow melt. Human alterations can also be significant contributors to increasing the potential for slope instability and/or triggering specific failures.

APPENDIX B INPUT PARAMETERS FOR THE GIS MODELING

The following are the input parameters used in the modeling. For additional information regarding these parameters and the algorithm, please refer to Miller (2002).

Slope_min = 0.50

Threshold value of the topographic index for slope instability. Pixels with index values greater than *Slope_min* are considered source areas for landsliding.

Sl = 2

The number of pixels over which slope is calculated (>1 to address pocket terracing).

channel_area_threshold = 7,500 m²

The contributing-area threshold for channel initiation in high gradient areas (areas with surface gradient $\geq S_{max}$).

C_min = 1,500 m²

Used to determine the contributing-area threshold as a function of surface gradient for low-gradient areas (those with surface gradient $< S_{max}$): $A = C_{min}/S^2$, where *A* is threshold contributing area and *S* is surface gradient.

S_max = 0.25

The minimum surface gradient for landslide potential. This value is used to separate low-gradient areas, for which a slope-dependent drainage threshold (*C_min*) is used for channel initiation, from high-gradient areas, for which a drainage area threshold (*channel_area_threshold*) alone is used for channel initiation.

P_min = 1.4

The minimum number of inflowing cells required for channel initiation. This value enforces a topographic convergence threshold, in addition to the drainage area threshold discussed above, for channel initiation.

debris_flow_slope = 0.165

Used in the Benda-Cundy model (Benda and Cundy, 1990) for estimating debris flow runout. This value specifies the channel gradient above which channelized flows do not stop at tributary junctions.

erode_slope_min = 0.15

Used in the Benda-Cundy model for debris flow runout. Specifies the channel gradient above which debris flows erode the channel bed.

thetamin = 0.14

Used for the Benda-Cundy model for debris flow runout. *Thetamin* specifies the channel gradient at and below which debris flows deposit material. Unlike the Benda-Cundy model, the gradient for debris flow deposition is made a function of estimated

valley-floor width. This allows a steeper slope to be specified for unchannelized areas, such as where debris flow channels enter steep, unchannelized debris fans.

$w_{min} = 30\text{ m}$

Used for the Benda-Cundy model for debris flow runout. The valley-floor width at and below which *thetamin* applies. Units correspond to the input DEM (e.g., meters).

$erode_slope_max = 0.27$

Used in the Benda-Cundy model for debris flow runout. Specifies the unchannelized gradient above which debris flows erode the slope.

$thetamax = 0.25$

Used for the Benda-Cundy model for debris flow runout. *Thetamax* specifies the channel gradient at and below which debris flows deposit material where valley-floor width is greater than *wmax* (below).

$w_{max} = 100\text{ m}$

Used for the Benda-Cundy model for debris flow runout. Specifies the valley width at and above which *thetamax* applies. For valley widths between *wmin* and *wmax*, the channel gradient for debris flow deposition is varied linearly between *thetamin* and *thetamax*.

$lstop_max = 5,000\text{ m}$

Specifies the maximum length for unchannelized, low-gradient ($< debris_flow_slope$, above) debris flow runout. If the distance from a source pixel to a channel exceeds *lstop_max*, the source pixel is assumed incapable of producing a debris flow that will travel to a channel.

$colluvial_volume = 15\text{ m}^3\text{ per meter}$

Used for estimating debris flow inundation areas. Specifies the average colluvial volume available for debris-flow scour per unit length of low-order channel. Given in DEM units, e.g., m³ per m traveled.

$colluvial_volume_0 = 10\text{ m}^3\text{ per meter}$

Used for estimating debris flow inundation areas. Specifies the average volume available for debris flow scour per unit length of traverse over unchannelized hillslopes.

$X_{min} = 30\text{ m}$

Specifies the minimum window length used for channel gradient estimation, in DEM units.

$X_{max} = 100\text{ m}$

Specifies the maximum window length used for estimating channel gradient.

$S_{min} = 0.001$

Specifies the channel gradient at and below which *Xmax* applies.

Smax = 0.2

Specifies the channel gradient at and above which *Xmin* applies. Window length varies linearly from *Xmin* to *Xmax*, as a function of channel gradient, for gradients between *Smax* and *Smin*.

Fit_Order = 2

The (integer) order of the polynomial used for fitting channel profiles.

junction_length = 50 m

The channel length used to estimate channel flow direction and tributary junction angles, in DEM units.

junction_angle = 11

Used with the Benda-Cundy model for debris flow runoff. Specifies the tributary junction angle, $\tan(85^\circ)$, above which debris flows deposit (unless the receiving channel gradient exceeds *debris_flow_slope*).

trigger_angle = 1.0

Used with the Benda-Cundy model for debris flow runoff. Specifies the junction angle, $\tan(45^\circ)$, for first-order tributary channels above which debris flows deposit.

Flow direction algorithm = 1

1 for Tarboton, 2 for Tarboton + convergence.

a_coef_0 = 0.4

The coefficient for cross-sectional flow area. Different coefficients may be used for channelized and unchannelized debris flows; *a_coef_0* is used for debris flow tracks traversing hillslope pixels that are not classified as channels.

b_coef_0 = 50.0

The coefficient for debris flow inundation area; *b_coef_0* is used for debris flows traversing hillslope pixels that are not classified as channels.

a_coef_c = 0.25

The coefficient for cross-sectional flow area for debris flow tracks traversing pixels classified as channels.

b_coef_c = 75.

The coefficient for debris flow inundation area for pixels classified as channels.

radius = 25

Used in creating transects for calculating valley cross-sectional area. First, every hillslope pixel is associated to the nearest channel pixel. Then a circle with a radius of the specified number of pixels is constructed about every channel point. Pixels intersected by the edge of this circle serve as endpoints for the transects. This is done both for a circle of the specified radius and for a circle with radius given by *radius*/5. This proce-

dures produce multiple potential valley-crossing transects for every channel point. The one producing the smallest cross-sectional area is used.

maxbin = 1.0

The largest ratio of inundation volume to maximum potential debris flow volume to continue estimating inundation hazards.

nbins = 256

The number of bins to use for tracking the cumulative distribution of debris flow volumes associated with pixels inundated for a debris flow track. A larger number of bins provides greater resolution of hazard variation, but requires greater processing time.

de_min_0 = 0.10

Used for estimating cross sectional area as a function of inundation width over flat areas. Cross sectional area is estimated as

$$A_{cs} = de_min \cdot W^{rp}$$

where W is deposit width, measured from the channel, and rp is an adjustable parameter (set to 1.0 in this case, so the cross sectional area corresponds to a deposit with a constant surface slope equal to de_min). Separate values for de_min may be specified for channelized and nonchannelized debris flows; de_min_0 applies to hillslope pixels not classified as channels.

de_min_c = 0.06

The value of de_min to use for pixels classified as channels.

de_max = 5

Valley transects are terminated if elevation along the transect decreases by an amount greater than de_max , in which case it is assumed a drainage divide has been crossed.

rp = 1

The exponent on W in the equation above for estimating cross sectional area through flat areas. A value of 1 corresponds to a deposit with a constant surface slope equal to de_min .

smooth_output = *y*

(*y/n*) Specifies whether the inundation ratio is smoothed prior to output. If smoothing is specified, it is done over a 3x3-pixel weighted average, excluding pixels with zero or no data values. Weighting is based on $(1-B)$, where B is the inundation ratio of the pixel. This preferentially weights high-hazard pixels.

buffer = 0

The size of buffer added around inundation hazard areas, in pixels. Buffer pixels are added based on the average inundation-ratio value of adjacent pixels with nonzero values.

APPENDIX C
LIST OF DRAFT MAP REVIEWERS

Name	Title	Organization	Area(s) Evaluated
Dr. John Beaulieu	State Geologist	Oregon Department of Geology and Mineral Industries, Portland, OR	Portland Metro area Blue River Columbia River Gorge Welches
Tom Ferrero	Engineering Geologist	Ferrero Geologic, Ashland, OR	Ashland
Dr. Richard Iverson	Research Hydrologist	Cascades Volcano Observatory, U.S. Geologic Survey, Vancouver, WA	Newton Creek
Ian P. Madin	Geologist, Mapping Section Leader	Oregon Department of Geology and Mineral Industries, Portland, OR	Marshland, Garibaldi, Columbia River Gorge, Portland Metro area
Dr. George R. Priest	Geologist, Coastal Section Leader	Oregon Department of Geology and Mineral Industries, Newport, OR	Garibaldi, Blue River, Depoe Bay, McKenzie Bridge
John Seward	Geotechnical Specialist	Oregon Department of Forestry, Roseburg, OR	Tyee Road, Ashland, Talent
Dr. Fred Swanson	Research Geologist	USDA Forest Service, PNW Research Station, Corvallis, OR	Cascadia, Echo Mtn., Mapleton, Blue River, McKenzie Bridge, Detroit, Chandler Mtn.
Thomas J. Wiley	Geologist, Southwest Oregon Section Leader	Oregon Department of Geology and Mineral Industries, Grants Pass, OR	Grants Pass, Merlin, Rogue River, Sexton, Grayback Mountain